






Floor Lamp | 1 x powerLEDs 18 W 500 mA | RGB  
15165

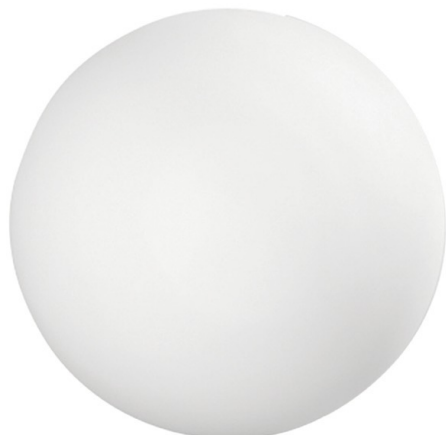

Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optic	Diffused
Power	18 W
Current intensity	500mA
CCT / Tonalità	RGB
C.C. / C.V.	CC
Safety class	3
IP	IP65
IK	10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PE
Colour	white

Electronics	
	N/O button - IR Remote - art.



Floor Lamp | 1 x powerLEDs 18 W 500 mA | RGB  
**15165**







Double emission floor lamp for outdoor application. The RGB LED light source with a diffused light distribution is composed of 1 powerleds LEDs.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 7.940 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 18 W.

The device features protection class III and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Oh!\_FL65 | Floor Lamp | Accessories  
15165

		Outer casing - outer casing for installation on ground or on concrete	Code 14930
		Pegs - peg for ground mounting	Code 14937
		anti-theft - anti-theft ground fixing bracket	Code 14082