



Pendant Luminaires | 220-240 V | 1xE27
15213



| Technical data | |
|--|-----------------|
| Installation position | Ceiling |
| Installation environment | Outdoor |
| Lamp cap | 1 x E27 Max 30W |
| Frequency | 50-60 Hz |
| Optic | Diffused |
| Light emission direction | downward |
| IP | IP65 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Induzione | No |
| Emergency mode | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |

| Finishing diffuser | |
|--------------------|-------------|
| Material | PE |
| Colour | translucent |

| Finishing mounting frame | |
|--------------------------|----------------|
| Material | Iron |
| Colour | white RAL 9010 |
| Processing | Coating |

Pendant Luminaires | 220-240 V | 1xE27
15213


Single emission pendant luminaires for outdoor application.
Compatibility: LED lamp, halogen 30 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 2.440 kg.

and can be ceiling-mounted.

| Illuminotechnical Features | |
|----------------------------|---------|
| Light Output Ratio (LOR) | 23 % |
| Luminous flux (source) | 1705 lm |
| Luminaire luminous flux | 405 lm |
| Consumption | 30 W |
| Luminaire efficacy | 13 lm/W |
| Colour rendering index | 100 Ra |

| UGR | |
|-------------------|----------|
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | < 19 |
| UGR axial | < 19 |

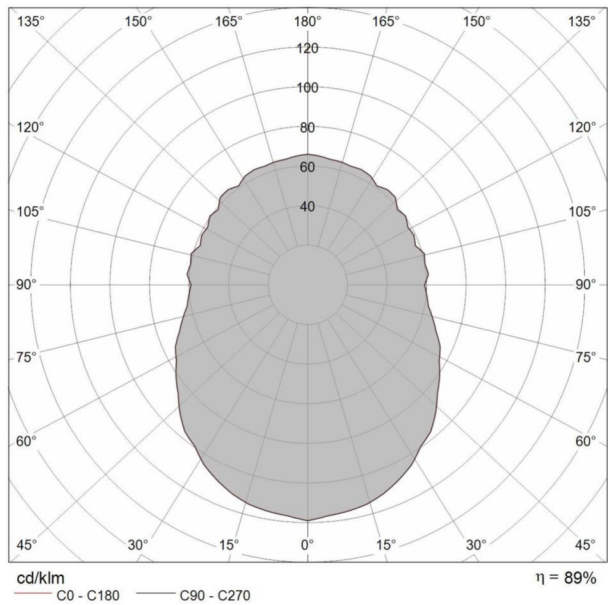

| Abstand [m] | Cone diameter [m] | Illuminance [lx] |
|-------------|-------------------|---------------------------|
| 0.5 | 28.64 | E(0°) E(C0) 88.0° 1930 |
| 1.0 | 57.27 | E(0°) E(C0) 88.0° 480 |
| 1.5 | 85.91 | E(0°) E(C0) 88.0° 210 |
| 2.0 | 114.55 | E(0°) E(C0) 88.0° 120 |
| 2.5 | 143.18 | E(0°) E(C0) 88.0° 80 |
| 3.0 | 171.82 | E(0°) E(C0) 88.0° 50 |

Abstand [m] Cone diameter [m] Illuminance [lx]

C0 - C180 (Hal beam angle: 176.0°)