

Ceiling Lights | 220-240 V | 1xE27  
15214





| Technical data                                 |                 |
|--|-----------------|
| Installation position                          | Ceiling         |
| Installation environment                       | Outdoor         |
| Lamp cap                                       | 1 x E27 Max 30W |
| Frequency                                      | 50-60 Hz        |
| Optic  | Diffused        |
| Light emission direction                       | downward        |
| Safety class                                   | 2               |
| IP   | IP65            |
| Glow wire test                                 | 650°            |
| Direct mounting on normally flammable surfaces | Yes             |
| CE   | Yes             |
| ETL  | No              |
| Induzione                                      | No              |
| Emergency mode                                 | No              |
| Motion sensor                                  | No              |
| Directional                                    | No              |
| Tilting  | No              |
| Walk-over                                      | No              |
| Drive-over                                     | No              |
| Cable included                                 | No              |
| Resin potting                                  | No              |

| Finishing diffuser |             |
|--------------------|-------------|
| Material           | PE          |
| Colour             | translucent |

| Finishing mounting frame |                |
|--------------------------|----------------|
| Material                 | Iron           |
| Colour                   | white RAL 9010 |
| Processing               | Coating        |


Ceiling Lights | 220-240 V | 1xE27  
15214

Double emission ceiling lights for outdoor application. Compatibility: LED lamp, halogen 30 W, compact fluo 14 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 1.94 kg.

The device features protection class II and can be ceiling-mounted.

| Illuminotechnical Features |          |
|----------------------------|----------|
| Light Output Ratio (LOR)   | 34 %     |
| Luminous flux (source)     | 1175 lm  |
| Luminaire luminous flux    | 405 lm   |
| Consumption                | 30 W     |
| Luminaire efficacy         | 13 lm/W  |
| Colour rendering index     | 100 Ra   |
| UGR                        |          |
| X=4H   Y=8H                | S=0.25H  |
| Reflection factor          | 70/50/20 |
| UGR transversal            | < 19     |
| UGR axial                  | < 19     |

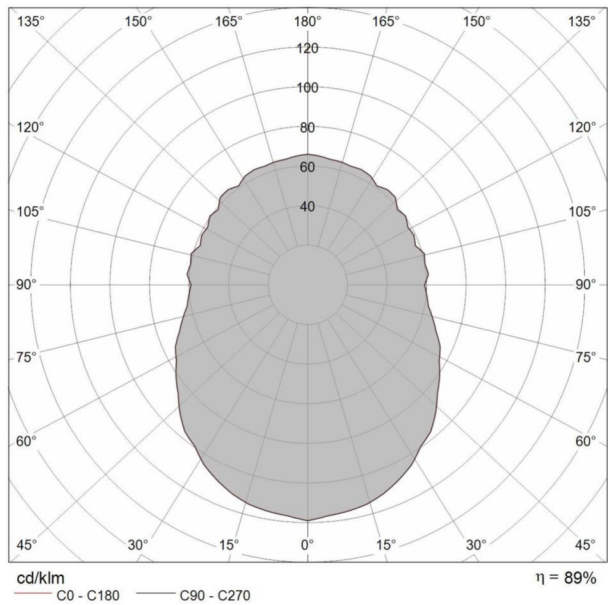

| Abstand [m] | Cone diameter [m] | Illuminance [lx]          |
|-------------|-------------------|---------------------------|
| 0.5         | 28.64             | E(0°)<br>E(C0) 88.0° 1930 |
| 1.0         | 57.27             | E(0°)<br>E(C0) 88.0° 480  |
| 1.5         | 85.91             | E(0°)<br>E(C0) 88.0° 210  |
| 2.0         | 114.55            | E(0°)<br>E(C0) 88.0° 120  |
| 2.5         | 143.18            | E(0°)<br>E(C0) 88.0° 80   |
| 3.0         | 171.82            | E(0°)<br>E(C0) 88.0° 50   |

Abstand [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Hal beam angle: 176.0°)