



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Lamp cap	1 x E27 Max 46W
Frequency	50-60 Hz
Optic	Diffused
Light emission direction	downward
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	translucent

Finishing mounting frame	
Material	Iron
Colour	white RAL 9010
Processing	Coating


Ceiling Lights | 220-240 V | 1xE27  
15217

Double emission ceiling lights for outdoor application. Compatibility: LED lamp, compact fluo 20 W, halogen 46 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 3.090 kg.

The device features protection class II and can be wall lights or ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	35 %
Luminous flux (source)	2000 lm
Luminaire luminous flux	700 lm
Consumption	46 W
Luminaire efficacy	15 lm/W
Colour rendering index	100 Ra
UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

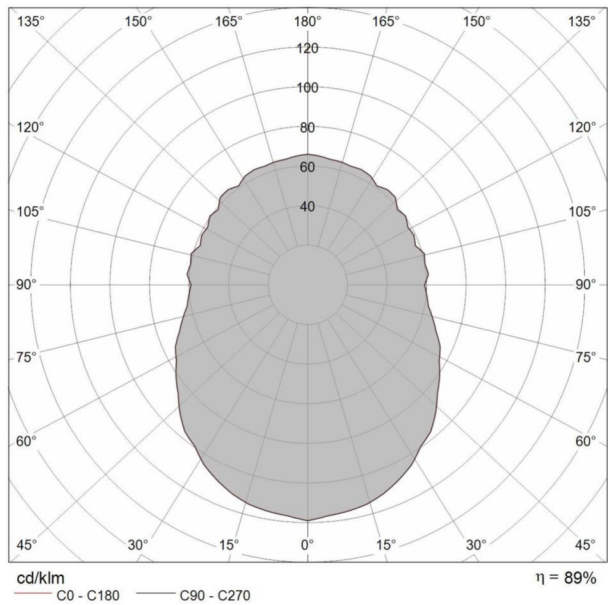

Abstand [m]	Cone diameter [m]	Illuminance [lx]
0.5	28.64	E(0°) E(C0) 88.0° 333 0
1.0	57.27	E(0°) E(C0) 88.0° 83 0
1.5	85.91	E(0°) E(C0) 88.0° 37 0
2.0	114.55	E(0°) E(C0) 88.0° 21 0
2.5	143.18	E(0°) E(C0) 88.0° 13 0
3.0	171.82	E(0°) E(C0) 88.0° 9 0

Abstand [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Hal beam angle: 176.0°)