SPARTA 1200 **7491**

astro

SKU 1322005



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 2.5 (kg) H: 1200mm W: 33mm D: 80mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Wall Mount - Horizontal/Vertical IP RATING: IP44

Not Applicable **CUT OUT HOLE: BATHROOM ZONE:** Zone 2, 3 **RECESS DEPTH:** Not Applicable **VOLTAGE:** Mains 230V

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: Mid-Power LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: UGR: 12.8W Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** To Be Advised **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 60,000 (Hrs) CRI: L70: To Be Advised

R9: To Be Advised

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) No DIMMABLE: No DRIVER/BALLAST VOLTAGE: 220-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 50,000 (Hrs) **DRIVER OUTPUT CURRENT:** 350 (mA) EFFICACY: To Be Advised DRIVER OUTPUT VOLTAGE: DRIVER INCLUDED?


ADDITIONAL INFORMATION

Not Applicable

BOX QUANTITY X6

Œ

Yes (Integral)

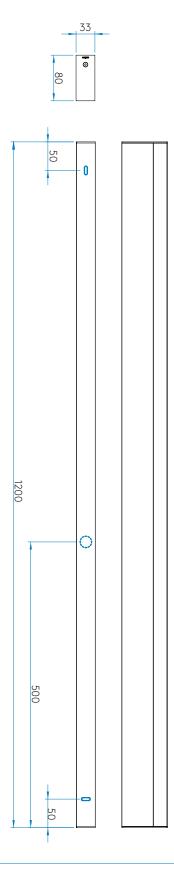

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com