


Gypsum_W1



Wall Lights | 220-240 V | topLED 7.5 W 200 mA | CRI 80
60834W00



Technical data	
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Power	7.5 W
Luminous flux (source)	1104 lm
Frequency	50 - 60 - Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	DC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +100°C
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	plaster
Colour	white

Finishing diffuser	
Material	Glass
Processing	Sandblasting



Wall Lights | 220-240 V | topLED 7.5 W 200 mA | CRI 80
60834W00

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 0 topped LED with CCT of 3000 K and a CRI 80; the source luminous flux is 1104 lm, with a 147.2 lm/W nominal luminous efficacy.


The device body is made of plaster and features a white finish; the diffuser is made of glass with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 1.643 kg. The power supply driver is included in the delivery.

The total absorbed power is 7.5 W.

The device features protection class I and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	47 %
Luminous flux (source)	1104 lm
Luminaire luminous flux	522.38 lm
Consumption	7.5 W
Luminaire efficacy	69 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 25

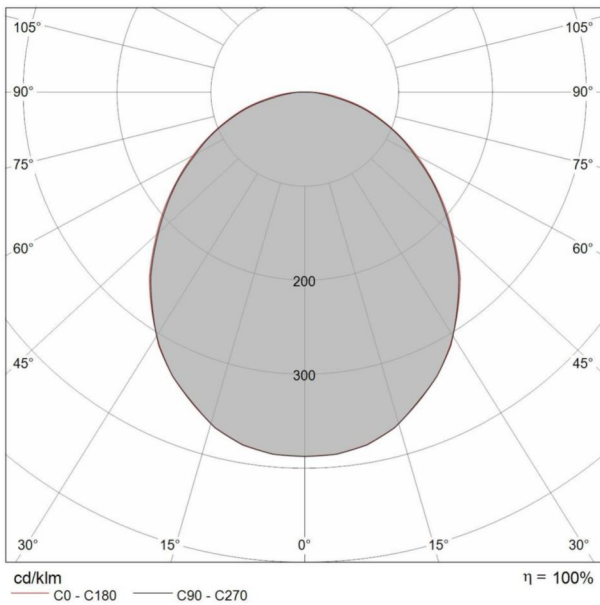

Abstand [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.19	E(0°) 809
	1.21	E(C90) 50.0° 107
		E(C0) 50.4° 105
1.0	2.38	E(0°) 202
	2.42	E(C90) 50.0° 27
		E(C0) 50.4° 26
1.5	3.58	E(0°) 90
	3.63	E(C90) 50.0° 12
		E(C0) 50.4° 12
2.0	4.77	E(0°) 51
	4.84	E(C90) 50.0° 7
		E(C0) 50.4° 7
2.5	5.96	E(0°) 32
	6.04	E(C90) 50.0° 4
		E(C0) 50.4° 4
3.0	7.15	E(0°) 22
	7.25	E(C90) 50.0° 3
		E(C0) 50.4° 3