



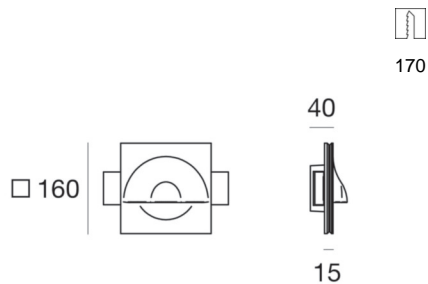

Wall Lights | 1 x powerLED 1,0 W 350 mA + 1 x powerLED 1,0 W 350 mA | CRI 80
60910N00



Technical data

Installation position	Wall lights - Wall lights - Ceiling - Ceiling
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Power	2 W
Luminous flux (source)	280 lm
Current intensity	mA
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +125°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No


Finishing casing


Material	plaster
Colour	white


Finishing diffuser


Material	PMMA
Colour	transparent

Electronics

 On/Off Driver - On/Off Driver - On/Off Driver - On/Off Driver
2 art.

 1-10V - N/O button - 1-10V - N/O button - 1-10V - N/O button - 1-10V - N/O button
1 art.

 DALI - Push and Simply Dim - DALI - Push and Simply Dim - DALI - Push and Simply Dim - DALI - Push and Simply Dim
1 art.

 On/Off Driver - On/Off Driver - On/Off Driver - On/Off Driver
1 art.



Wall Lights | 1 x powerLED 1,0 W 350 mA + 1 x powerLED 1,0 W 350 mA | CRI 80
60910N00

Single emission wall lights for indoor application. The natural white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 140 lm, with a 140.0 lm/W nominal luminous efficacy. The natural white LED light source with a diffused light distribution is composed of 1 powered LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 140 lm, with a 140.0 lm/W nominal luminous efficacy.

The device body is made of plaster and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP20; the total weight is of 0.79 kg. The power supply driver is not provided and is to be ordered separately.


The total absorbed power is 2,0 W.

The device features protection class III and can be wall lights, wall lights, ceiling or ceiling-mounted, with a 170 x 170 mm hole (in plasterboard) with an outer casing, code 61260(for concrete or masonry).

Illuminotechnical Features	
Luminous flux (source)	280 lm
Colour temperature	4000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra



Gypsum_WRX | Wall Lights | Accessories
60910N00



Outer casing - formwork for concrete / cement
L=230mm, H=232mm, D=51mm

Finish

Grey

Code

61260



Thick - KIT thicknesses for installation on plasterboard

Code

60830