


Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80  
61170N00

   C.C.  IP65  

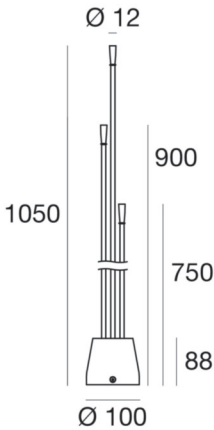

Technical data	
Type	Bollard
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	4.5 W
Frequency	50 - 60 - Hz
CCT / Tone	4000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Operating temperature	-40°C / +125°C
Driver included	Driver
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Multiple emission
Net weight	0.776 Kg

Finishing casing	
Material	copper
Processing	burnishing



Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80  
**61170N00**

Multiple emission bollard & pole for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 3 powerLEDs with CCT of 4000 K and a CRI 80.

The device body is made of copper, processed by means of burnishing. The ingress protection degree is IP65; the total weight is of 0.776 kg.


The total absorbed power is 4.5 W.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Colour temperature	4000 K
Colour rendering index	80 Ra



Cu-Flex\_3 | Bollard & Pole | Accessories  
**61170N00**



Pegs

Code  
14931