
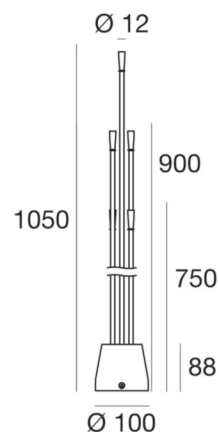


Bollard & Pole | 180-300 V | 6 x powerLED 9 W 500 mA | CRI 80  
**61180W00**



Technical data	
Type	Bollard
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	9 W
Luminous flux (source)	1080 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
AC / DC	AC-DC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Multiple emission
Net weight	1.276 Kg

Finishing casing	
Material	copper
Processing	burnishing

Bollard & Pole | 180-300 V | 6 x powerLED 9 W 500 mA | CRI 80  
**61180W00**

Multiple emission bollard & pole for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 6 powerled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1080 lm, with a 120.0 lm/W nominal luminous efficacy.

The device body is made of copper, processed by means of burnishing. The ingress protection degree is IP65; the total weight is of 1.276 kg.


The total absorbed power is 9 W.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Luminous flux (source)	1080 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra



Cu-Flex\_6 | Bollard & Pole | Accessories  
**61180W00**



Pegs

Code  
14931