


# Orient-C\_3



Systems | 220-240 V | topLED 30 W 700 mA | CRI 80  
**64244W00**

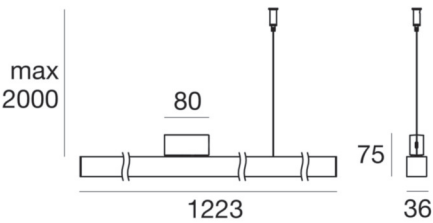

Technical data	
Type	Mono System
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Power	30 W
Luminous flux (source)	3569 lm
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
AC / DC	DC
Safety class	2
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Operating temperature	-40°C / +100°C
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.14 Kg

Finishing casing	
Material	Aluminium
Colour	embossed
Processing	Coating



Systems | 220-240 V | topLED 30 W 700 mA | CRI 80  
**64244W00**

Single emission systems for indoor application. The warm white LED light source with a general lighting light distribution is composed of 117 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3569 lm, with a 119.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 1.14 kg.

The total absorbed power is 30 W.

The device features protection class II and can be ceiling-mounted.

Illuminotechnical Features	
Luminous flux (source)	3569 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra