


Tour_PU3



Pendant Luminaires | topLED 70 W 24 V | CRI 80
64691W00

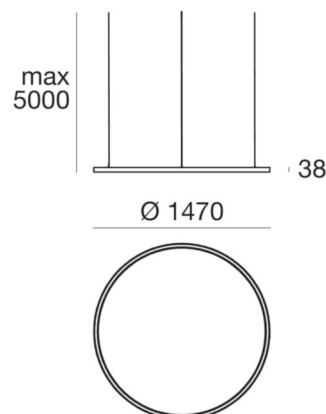

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Light emission direction	upward
Power	70 W
Luminous flux (source)	9355 lm
Tensione	24V
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +85°C
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	nickel
Processing	Brushing

Electronics



N/O button



DALI - 1-10V



Switching Driver



Pendant Luminaires | topLED 70 W 24 V | CRI 80
64691W00


Single emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 336 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 9355 lm, with a 133.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a nickel finish, processed by means of brushing. The ingress protection degree is IP40; the total weight is of 6 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 70 W.

The device features protection class III and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	42 %
Luminous flux (source)	9355 lm
Luminaire luminous flux	4016.68 lm
Consumption	51 W
Luminaire efficacy	78 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

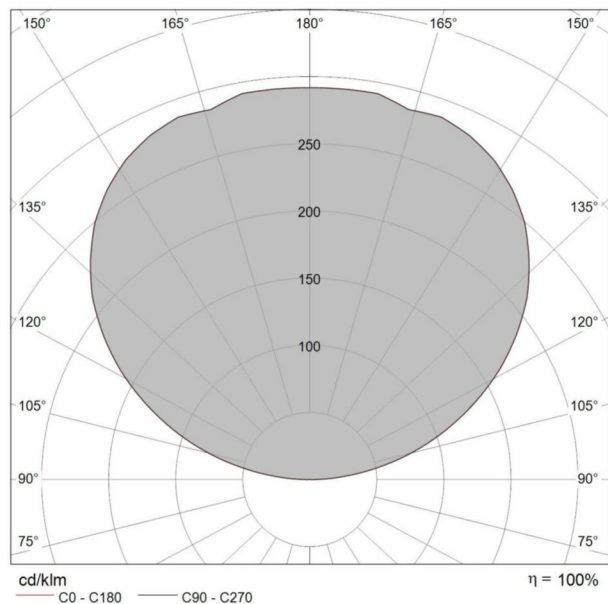

Abstand [m]	Cone diameter [m]	Iluminance [lx]
3.0	11.78	E(180°) 130 E(C0) 117.0° 6
2.5	9.81	E(180°) 187 E(C0) 117.0° 9
2.0	7.85	E(180°) 293 E(C0) 117.0° 14
1.5	5.89	E(180°) 521 E(C0) 117.0° 25
1.0	3.93	E(180°) 1171 E(C0) 117.0° 55
0.5	1.96	E(180°) 4685 E(C0) 117.0° 221

Abstand [m] Cone diameter [m] Iluminance [lx]
C0 - C180 (Hal beam angle: 126.0°)



	Fixing base	Code <u>65144</u>
	Fixing base	Code <u>65145</u>
	Suspensions	Code <u>64671</u>