


Bollard & Pole | 100-240 V | arrayLED 9 W 250 mA | CRI 80
64734N00

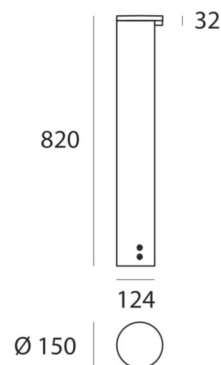

| Technical data | |
|--|---------------|
| Installation position | Floor |
| Installation environment | Outdoor |
| Light Source | LED |
| Optic | Diffused |
| Power | 9 W |
| Luminous flux (source) | 1408 lm |
| Frequency | 50 - 60 Hz |
| CCT / Tonalità | 4000 K |
| Colour rendering index | 80 Ra |
| AC / DC | DC |
| Safety class | 2 |
| IP | IP66 |
| IK | 09 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Operating temperature | -30°C / +85°C |
| Driver included | Yes |
| Induzione | No |
| Emergency mode | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |

| Finishing casing | |
|--------------------------|---------------|
| Material | Aluminium |
| Colour | grey RAL 9006 |
| Processing | Coating |
| Finishing diffuser | |
| Material | PC |
| Colour | transparent |
| Finishing mounting frame | |
| Material | Aluminium |
| Colour | grey RAL 9006 |
| Processing | Coating |

Bollard & Pole | 100-240 V | arrayLED 9 W 250 mA | CRI 80
64734N00


Single emission bollard & pole for outdoor application. The natural white LED light source with a diffused light distribution is composed of 1 arrayed LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1408 lm, with a 156.4 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a grey ral 9006 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a grey ral 9006 finish, processed by means of coating. The ingress protection degree is IP66; the total weight is of 4.05 kg. The power supply driver is included in the delivery.

The total absorbed power is 9 W.

The device features protection class II and can be floor-mounted.

| Illuminotechnical Features | |
|---------------------------------------|----------------|
| Light Output Ratio (LOR) | 74 % |
| Luminous flux (source) | 1408 lm |
| Luminaire luminous flux | 1054 lm |
| Consumption | 10 W |
| Luminaire efficacy | 105 lm/W |
| Colour temperature | 4000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 80 Ra |
| UGR | |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |
| UGR transversal | > 25 |
| UGR axial | < 16 |

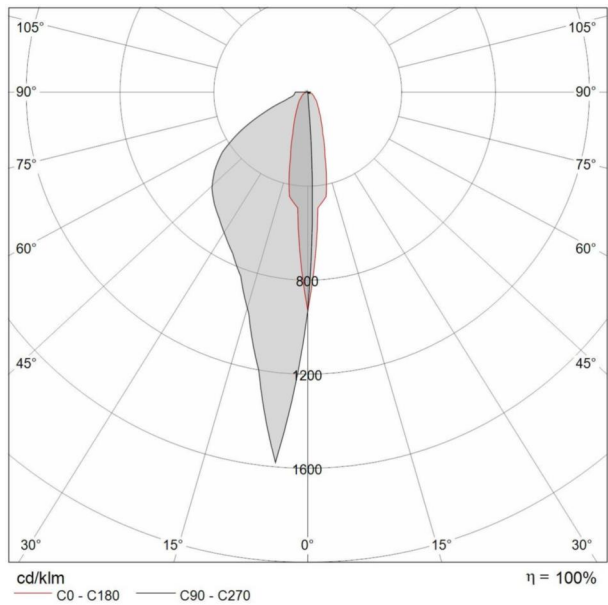



Ryo_1 | Bollard & Pole | Accessories
64734N00



Pegs - Stainless steel bolts with positioning template

Code
64758