


Lines | Modular
65027



| Technical data | |
|--|-----------------------|
| Installation position | Wall lights - Ceiling |
| Installation environment | Indoor |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Induzione | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |

| Finishing casing | |
|------------------|-----------|
| Material | Aluminium |
| Processing | Coating |

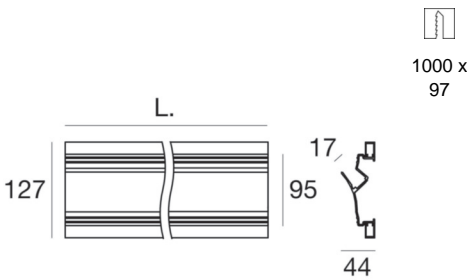




Lines | Modular
65027

Single emission lines for indoor application.

The device body is made of aluminium, processed by means of coating. the total weight is of 1.06 kg.


and can be wall lights or ceiling-mounted, with a 1000 x 1000 mm hole (in plasterboard).

Components

| | | |
|--|--|-----------------------------|
|  | Inflex - LED Strip topLED 14 W 24 V Modular Slave | Code <u>65052</u> |
|  | Inflex - LED Strip topLED 14 W 24 V Modular Master | Code <u>65050</u> |
|  | Inflex - LED Strip topLED 70 W 24 V Modular Slave | Code <u>65051</u> |




Fylo+ Recessed | Lines | Accessories
65027



Diffuser

Code
65054



Diffuser

Code
65055