


Fylo+ Out Recessed



Lines | Modular
65039

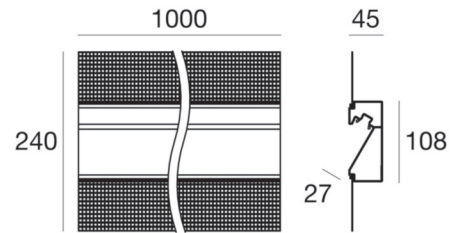

Technical data	
Installation position	Wall lights
Installation environment	Outdoor
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing casing	
Material	Aluminium
Processing	Coating

Fylo+ Out Recessed



Lines | Modular
65039

Single emission lines for outdoor application.

The device body is made of aluminium, processed by means of coating. the total weight is of 1.63 kg.

and can be wall lights-mounted with an outer casing, code 65038(for concrete or masonry).

Components

Silicone_F 120 LEDs/m - LED Strip | topLED 48 W 24 V |
Modular

Code

62761

Silicone_F Basic - LED Strip | stripLED 24 W 24 V | Modular


Code

62759

Fylo+ Out Recessed



Fylo+ Out Recessed | Lines | Accessories
65039




Diffuser

Code
62757




Diffuser

Code
62758



Closing cap

Code
65023



Outer casing
L=1000mm, H=112mm, D=47mm

Code
65038