




Ceiling Lights | 220-240 V | 3xE27
7471

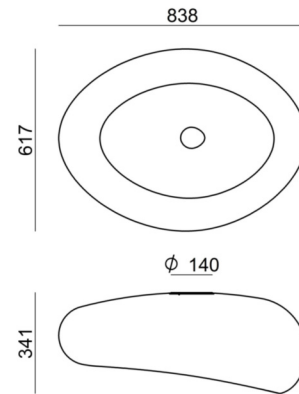

Technical data	
Designer	Lorenzo Antonioni
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	3 x E27 Max 46W
Frequency	50-60 Hz
Optics	General Lighting
Light emission direction	downward and upward
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	6.020 Kg

Finishing diffuser	
Material	PMMA - PE
Colour	white - neutral

Ceiling Lights | 220-240 V | 3xE27 7471

Double emission ceiling lights for indoor application. Compatibility: LED lamp, compact fluo 20 W, halogen 46 W; lamp cap 3xE27.

The diffuser is made of pe the diffuser is made of pmma. The ingress protection degree is IP40; the total weight is of 6.020 kg.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	80 %
Luminous flux (source)	2100 lm
Luminaire luminous flux	1685 lm
Consumption	138 W
Luminaire efficacy	15 lm/W
Colour temperature	2500 K
Colour rendering index	100 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°

