




Ceiling Lights | 220-240 V | 1x2GX13  
7792

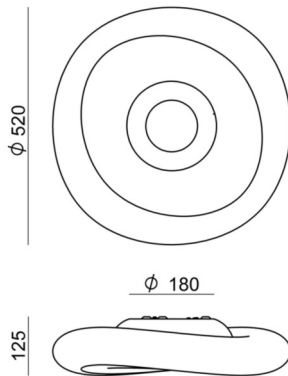

Technical data	
Collection	ma[&]de
Installation position	Ceiling
Installation environment	Indoor
Power	1 x 22 W
Lamp cap	1 x 2GX13
	50 - 60 Hz
Optic	Diffused
Light emission direction	downward and upward
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Ceiling Lights | 220-240 V | 1x2GX13  
7792


Double emission ceiling lights for indoor application. Fluorescent lamp included 22W, lamp cap 1x2GX13.

The diffuser is made of pe; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 2.540 kg. The power supply driver is included in the delivery.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	100 %
Luminous flux (source)	1900 lm
Luminaire luminous flux	1900 lm
Consumption	23 W
Luminaire efficacy	82 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

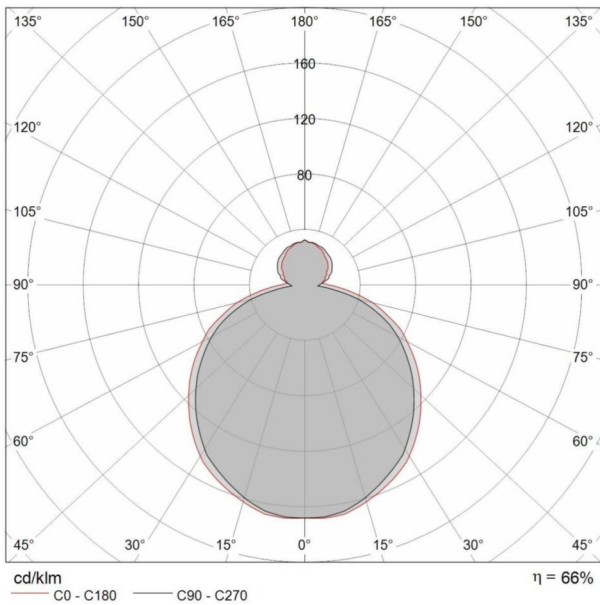

Abstand [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.58	1277	57.6°	98	
	1.80	98	61.0°	73	
1.0	3.15	319	57.6°	25	
	3.61	25	61.0°	18	
1.5	4.73	142	57.6°	8	
	5.41	8	61.0°		
2.0	6.30	80	57.6°	6	
	7.22	6	61.0°	5	
2.5	7.88	51	57.6°	4	
	9.02	4	61.0°	3	
3.0	9.45	35	57.6°	3	
	10.82	3	61.0°	2	

Abstand [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Hal beam angle: 122.0°)

— C90 - C270 (Hal beam angle: 115.2°)