



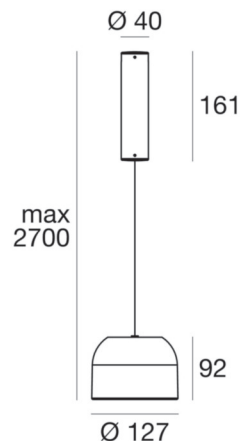

Systems | 220-240 V | arrayLED 11 W 500 mA | CRI 80  
8422



Technical data	
Type	Mono System
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	11 W
Luminous flux (source)	1162 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.95 Kg

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	PC
Processing	Sandblasting



Systems | 220-240 V | arrayLED 11 W 500 mA | CRI 80  
8422

Single emission systems for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1162 lm, with a 105.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 0.95 kg.

The total absorbed power is 11 W.

The device features protection class II and can be wall lights-mounted.

### Illuminotechnical Features

Light Output Ratio (LOR)	70 %
Luminous flux (source)	1162 lm
Luminaire luminous flux	820 lm
Consumption	11 W
Luminaire efficacy	74 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra

### Life / Failure Ratio


L80 B20 C0 80h

### UGR

X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 22

### OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	62°

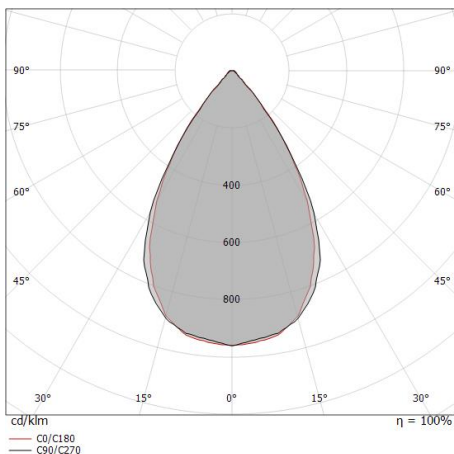

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	0.63 0.61	3150	956	991
1.0	1.26 1.21	788	239	248
1.5	1.89 1.82	350	106	110
2.0	2.52 2.42	197	60	62
2.5	3.15 3.03	126	38	40
3.0	3.78 3.63	88	27	28

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 62.4°)  
— C90/C270 (Half-peak divergence: 64.4°)