




Uplights | 190-250 V | 1 x powerLED 2,0 W 630 mA | CRI 80
86097W18

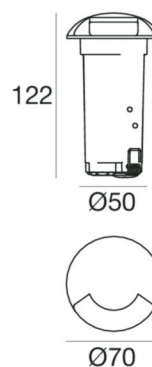

Technical data

Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optic	180°
Power	2 W
Luminous flux (source)	208 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	DC
Safety class	1
IP	IP67
IK	10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C ÷ +50°C
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	1500 Kg
Cable included	Yes
Cable length	1 m
Resin potting	No

Finishing casing

Material	Aluminium
Colour	grey
Processing	Coating



Uplights | 190-250 V | 1 x powerLED 2,0 W 630 mA | CRI 80
86097W18

Single emission uplights for outdoor application. The warm white LED light source with a 180° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 208 lm, with a 104.0 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a grey finish, processed by means of coating. The ingress protection degree is IP67; the total weight is of 0.35 kg. The power supply driver is included in the delivery.

The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class I and can be floor-mounted with an outer casing, code 84935(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	100 %
Luminous flux (source)	208 lm
Luminaire luminous flux	208 lm
Consumption	2,0 W
Luminaire efficacy	104 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	> 25

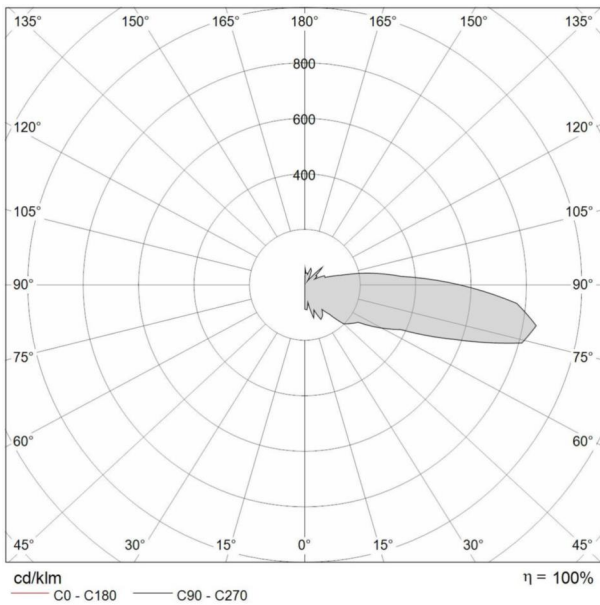



Dans_1 | Uplights | Accessories
86097W18



Outer casing
L=139mm, H=69mm, D=69mm

Code
84935