


Uplights | 1 x powerLED 0,7 W 220 mA | CRI 80  
86717W00



7,5 | 6 |

30



Technical data	
Type	Frame
Installation position	Wall lights - Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	powerLED
Optics	General Lighting
Light emission direction	upward
Power	0.7 W
Source lumens	66 lm
Current intensity	220mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Operating temperature	-20 / +50
Driver included	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	Yes
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	Yes
Type of light emission	Single emission
Net weight	0.030 Kg
Electrostatic discharge protection	No
Surge protection	No

#### Finishing casing

Material	OT58 brass
Colour	chrome
Processing	Galvanic Chromium Plating

#### Finishing diffuser

Material	Extra clear glass - Tempered
Colour	opaline
Processing	Sandblasting

#### Electronics

	99249 1-10V N/O button Multi Power 190~250V AC / 180~275V DC
	99151 DALI Push and Simply Dim Multi Power 190~250V AC / 180~275V DC
	99198 On/Off Driver 180~300V AC
	99307 On/Off Driver 190~250V AC / 180~275V DC

#### Cables Electrification

Cable connector	No
-----------------	----

Uplights | 1 x powerLED 0,7 W 220 mA | CRI 80  
86717W00

Single emission uplights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 66 lm.

The device body is made of ot58 brass and features a chrome finish, processed by means of galvanic chromium plating; the diffuser is made of extra clear glass - tempered with a sandblasting treatment. The ingress protection degree is IP44; the total weight is of 0.030 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 0,7 W. The power supply cable is included and features.



The device features protection class III and can be wall lights or floor-mounted, with a 30 mm diameter hole (in plasterboard) with an outer casing, code 84952(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	84 %
Source lumens	66 lm
Delivered lumens	56 lm
Consumption	0,7 W
Luminaire efficacy	80 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	> 28

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	116°

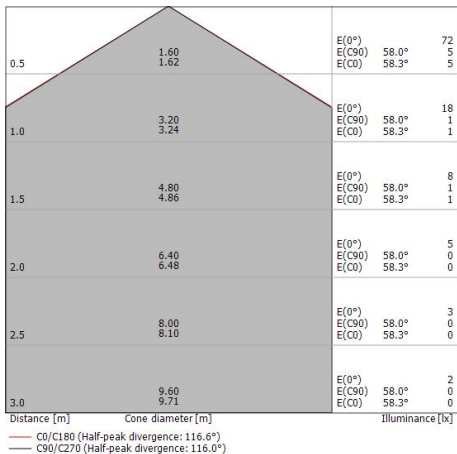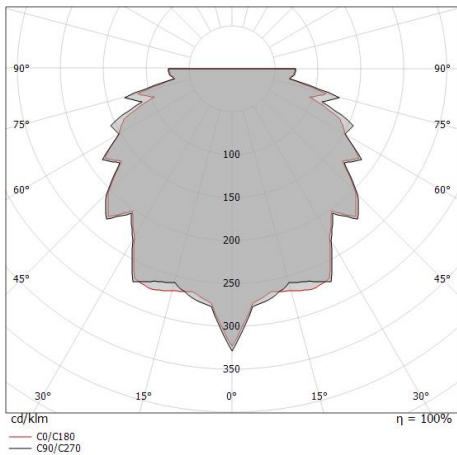



Vissa\_R | Uplights | Accessories  
86717W00



Outer casing - Oak  
L=20mm, H=31mm, D=31mm

Code  
84995



Outer casing  
Type of installation: wood flooring L=43mm, H=2mm, D=43mm

Code  
84952