
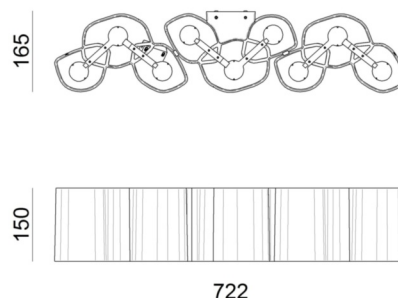


Wall Lights | 220-240 V | topLED 20 W 500 mA

CRI 90

8690



Technical data	
Construction year	2019
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	downward and upward
Power	20 W
Source lumens	2076 lm
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
AC / DC	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Dimmable article	Phase cut
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PC
Colour	white

Finishing mounting frame	
Material	Iron
Colour	embossed white RAL 9003



Wall Lights | 220-240 V | topLED 20 W 500 mA | CRI 90
8690

Double emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 72 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2076 lm, with a 103.8 lm/W nominal luminous efficacy.


The diffuser is made of PC; the mounting frame is made of iron, with a embossed white ral 9003 finish. The ingress protection degree is IP20;

The total absorbed power is 20 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Source lumens	2076 lm
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25
LED Life / Failure Ratio	
L70 B20 C0 72.5h (at Tj 115 Ta 25)	



Dimmer
220-240V

Code
KIT0026



Dimmer
Radio-frequenza, 85-240V

Code
KIT0080