




Pendant Luminaires | 220-240 V | topLED 41 W 1000 mA | CRI 80
90309

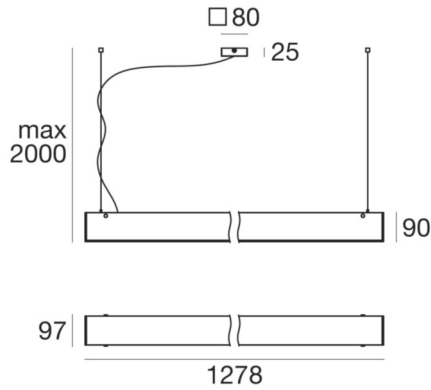

| Technical data | |
|--|------------------|
| Installation position | Ceiling |
| Installation environment | Indoor |
| Light Source | LED |
| Optics | General Lighting |
| Light emission direction | downward |
| Power | 41 W |
| Luminous flux (source) | 4508 lm |
| Frequency | 60 - 50 Hz |
| CCT / Tonaltà | 3000 K |
| Colour rendering index | 80 Ra |
| Safety class | 2 |
| IP | IP20 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| ETL | No |
| Fire Rated (BS 476 PT21 compliant) | No |
| Driver included | Driver |
| Induction | No |
| Emergency mode | No |
| Motion sensor | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | No |
| Resin potting | No |
| Type of light emission | Double emission |

| Finishing casing | |
|--------------------|-------------------------|
| Material | Iron |
| Colour | embossed white RAL 9003 |
| Processing | Coating |
| Finishing diffuser | |
| Material | Glass |
| Colour | white |
| Processing | Sandblasting |



Pendant Luminaires | 220-240 V | topLED 41 W 1000 mA | CRI 80
90309

Double emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 72 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 4508 lm, with a 110.0 lm/W nominal luminous efficacy.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of glass with a sandblasting treatment. The ingress protection degree is IP20;

The total absorbed power is 41 W.

The device features protection class II and can be ceiling-mounted.

Illuminotechnical Features

| | |
|---------------------------------------|----------------|
| Luminous flux (source) | 4508 lm |
| Colour temperature | 3000 K |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Colour rendering index | 80 Ra |

Life / Failure Ratio

L70 B20 C0 72.5h