






Downlights | topLED 8 W 220 mA | CRI 80
91990N00

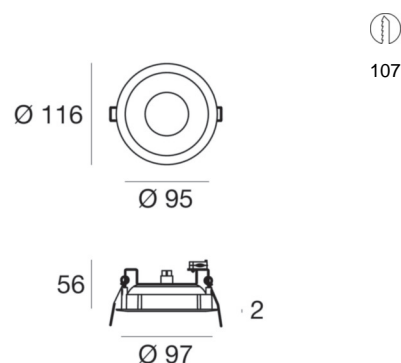

Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Power	8 W
Luminous flux (source)	1070 lm
Current intensity	220mA
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
IK	05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +90°C
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.30 m
Resin potting	No

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Electronics	
	DALI - Push and Simply Dim
	1-10V - N/O button

Downlights | topLED 8 W 220 mA | CRI 80
91990N00

Single emission downlights for indoor application. The natural white LED light source with a diffused light distribution is composed of 48 topLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 1070 lm, with a 133.8 lm/W nominal luminous efficacy and an operating lifetime (L70) of 100000 hours.


The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 0.25 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W. The power supply cable is included and features.

The device features protection class III and can be ceiling-mounted, with a 107 mm diameter hole (in plasterboard).

Illuminotechnical Features	
Light Output Ratio (LOR)	30 %
Luminous flux (source)	1070 lm
Luminaire luminous flux	321 lm
Consumption	8 W
Luminaire efficacy	41 lm/W
Colour temperature	4000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	< 25

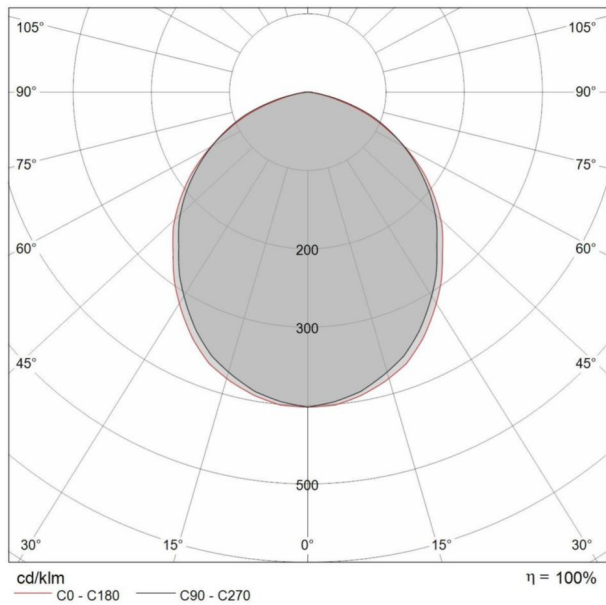

Abstand [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.22 1.28	E(0°) 516 E(C90) 66 E(C0) 61
1.0	2.43 2.55	E(0°) 129 E(C90) 17 E(C0) 15
1.5	3.65 3.83	E(0°) 57 E(C90) 7 E(C0) 7
2.0	4.87 5.10	E(0°) 32 E(C90) 4 E(C0) 4
2.5	6.09 6.38	E(0°) 21 E(C90) 3 E(C0) 2
3.0	7.30 7.65	E(0°) 14 E(C90) 2 E(C0) 2

Abstand [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Hal beam angle: 103.8°)
C90 - C270 (Hal beam angle: 101.2°)