


Rada_R3



Downlights | topLED 18 W 500 mA | CRI 80
92000W00

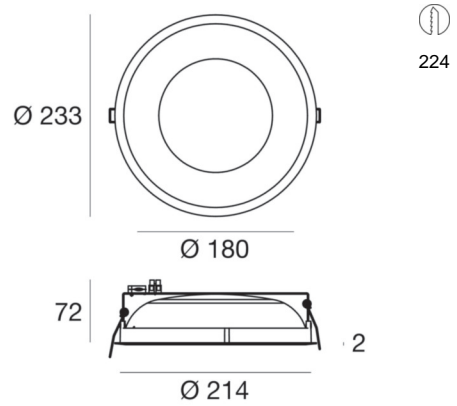


Technical data	
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optic	Diffused
Power	18 W
Luminous flux (source)	2520 lm
Current intensity	500mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP40
IK	05
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +90°C
Driver included	No
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.30 m
Resin potting	No

Finishing casing

Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Electronics



On/Off Driver



1-10V - N/O button



DALI - Push and Simply Dim

Downlights | topLED 18 W 500 mA | CRI 80
92000W00

Single emission downlights for indoor application. The warm white LED light source with a diffused light distribution is composed of 144 topLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2520 lm, with a 140.0 lm/W nominal luminous efficacy and an operating lifetime (L70) of 100000 hours.


The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP40; the total weight is of 0.6 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 18 W. The power supply cable is included and features.

The device features protection class III and can be ceiling-mounted, with a 224 mm diameter hole (in plasterboard).

Illuminotechnical Features	
Light Output Ratio (LOR)	56 %
Luminous flux (source)	2520 lm
Luminaire luminous flux	1436 lm
Consumption	18 W
Luminaire efficacy	80 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	> 25

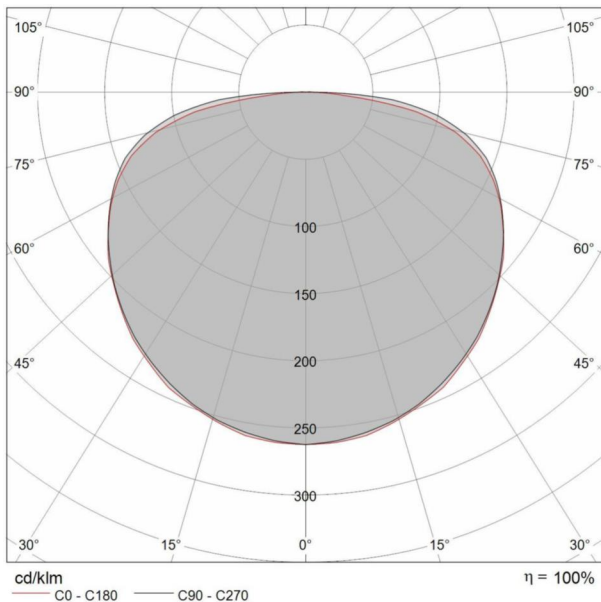

Abstand [m]	Cone diameter [m]	Illuminance [lx]
0.5	3.31	E(0°) 1507
	2.99	E(C90) 73.2° 18
		E(C0) 71.5° 24
1.0	6.62	E(0°) 377
	5.98	E(C90) 73.2° 5
		E(C0) 71.5° 6
1.5	9.94	E(0°) 167
	8.97	E(C90) 73.2° 2
		E(C0) 71.5° 3
2.0	13.25	E(0°) 94
	11.95	E(C90) 73.2° 1
		E(C0) 71.5° 2
2.5	16.56	E(0°) 60
	14.94	E(C90) 73.2° 1
		E(C0) 71.5° 1
3.0	19.87	E(0°) 42
	17.93	E(C90) 73.2° 1
		E(C0) 71.5° 1

Abstand [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Hal beam angle: 143.0°)
 - - C90 - C270 (Hal beam angle: 146.4°)