


Wall Lights | 1 x powerLED 1,5 W 500 mA | CRI 80  
**92322W05**



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optic	5°
Power	1.5 W
Luminous flux (source)	143 lm
Current intensity	500mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C ÷ +50°C
Driver included	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	No

Finishing casing	
Material	Brass
Colour	nickel
Processing	Brushing

Electronics	
	On/Off Driver 1 - 2 art.
	On/Off Driver 2 - 3 art.
	On/Off Driver 3 - 6 art.
	On/Off Driver 6 - 12 art.
	DALI - Push and Simply Dim 1 - 12 art.
	1-10V - N/O button 1 - 12 art.

Wall Lights | 1 x powerLED 1,5 W 500 mA | CRI 80  
92322W05

Single emission wall lights for indoor application. The warm white LED light source with a 5° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 143 lm, with a 143.0 lm/W nominal luminous efficacy.


The device body is made of brass and features a nickel finish, processed by means of brushing. The ingress protection degree is IP20; the total weight is of 0.039 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,5 W. The power supply cable is included and features.

The device features protection class III and can be wall lights or ceiling-mounted, with a 15 mm diameter hole (in plasterboard) with an outer casing, code 84917(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	91 %
Luminous flux (source)	143 lm
Luminaire luminous flux	131 lm
Consumption	1,5 W
Luminaire efficacy	87 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	> 25

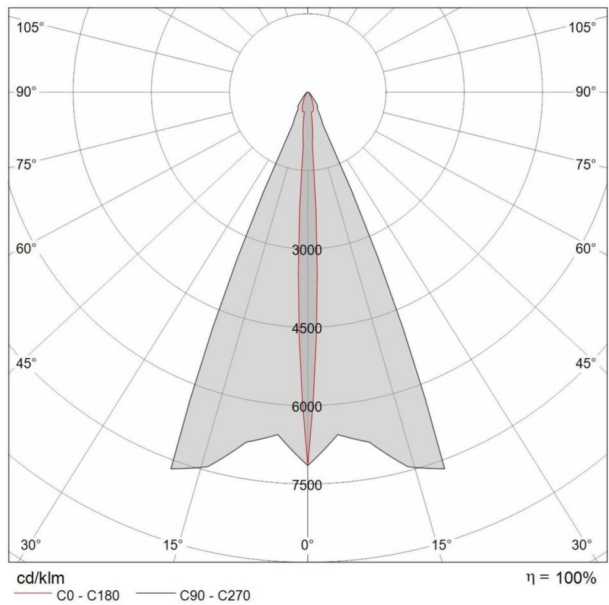

Abstand [m]	Cone diameter [m]	Illuminance [lx]
0.5	95.49	E(0°) E(C0) 89.4° 3746 0
1.0	190.98	E(0°) E(C0) 89.4° 936 0
1.5	286.47	E(0°) E(C0) 89.4° 416 0
2.0	381.96	E(0°) E(C0) 89.4° 234 0
2.5	477.45	E(0°) E(C0) 89.4° 150 0
3.0	572.94	E(0°) E(C0) 89.4° 104 0



Petit\_R | Wall Lights | Accessories  
**92322W05**



Outer casing  
L=80mm, H=60mm, D=60mm

**Code**  
84917