



Wall Lights | 1 x powerLED 2,0 W 630 mA | CRI 80
92559W05

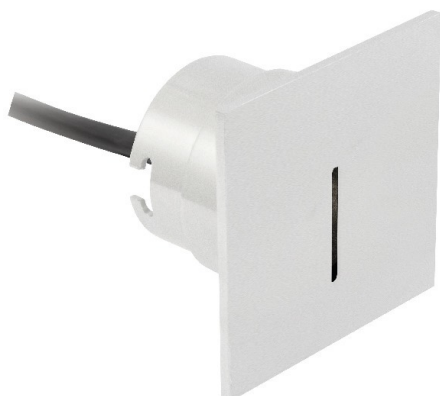

52



Technical data	
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optic	5°
Power	2 W
Luminous flux (source)	208 lm
Current intensity	630mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes

Finishing casing

Material	Aluminium
Colour	grey
Processing	Coating

Electronics



On/Off Driver



On/Off Driver



On/Off Driver

Wall Lights | 1 x powerLED 2,0 W 630 mA | CRI 80
92559W05

Single emission wall lights for outdoor application. The warm white LED light source with a 5° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 208 lm, with a 104.0 lm/W nominal luminous efficacy.


The device body is made of aluminium and features a grey finish, processed by means of coating. The ingress protection degree is IP65; the total weight is of 0.150 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights-mounted, with a 52 mm diameter hole (in plasterboard) with an outer casing, code 84338(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	62 %
Luminous flux (source)	208 lm
Luminaire luminous flux	131 lm
Consumption	2,0 W
Luminaire efficacy	65 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	> 25

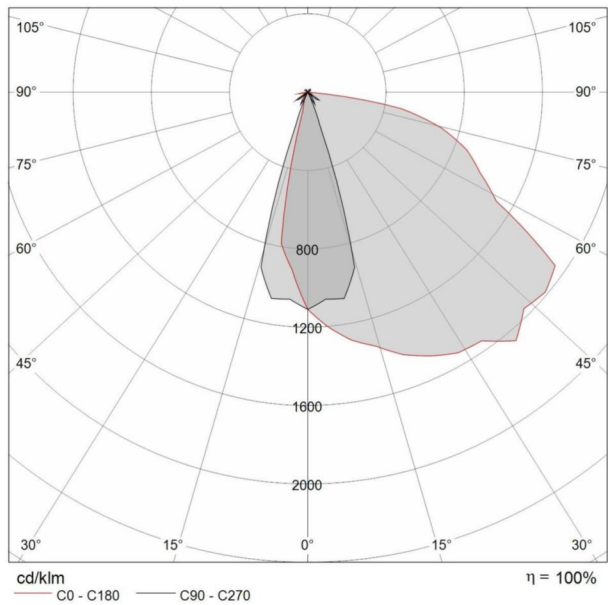



Cut_Q | Wall Lights | Accessories
92559W05



Outer casing
L=72mm, H=62.5mm, D=62.5mm

Code
84338