


Wall Lights | 190-250 V | 2 x powerLED 4 W 630 mA | CRI 80
92681W12

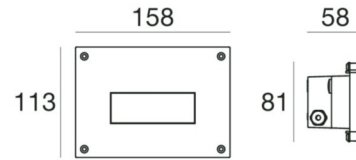

Technical data	
Installation position	Wall lights
Installation environment	Outdoor
Light Source	LED
Optic	120°
Power	4 W
Luminous flux (source)	416 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	DC
Safety class	1
IP	IP66
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +50°C
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes

Finishing casing	
Material	Stainless steel 316
Colour	steel
Processing	Brushing

Wall Lights | 190-250 V | 2 x powerLED 4 W 630 mA | CRI 80
92681W12

Single emission wall lights for outdoor application. The warm white LED light source with a 120° light distribution is composed of 2 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 416 lm, with a 104.0 lm/W nominal luminous efficacy.


The device body is made of stainless steel and features a steel finish, processed by means of brushing. The ingress protection degree is IP66; the total weight is of 0.56 kg. The power supply driver is included in the delivery.

The total absorbed power is 4 W. The power supply cable is included and features.

The device features protection class I and can be wall lights-mounted with an outer casing, code 98009(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	75 %
Luminous flux (source)	416 lm
Luminaire luminous flux	316 lm
Consumption	4 W
Luminaire efficacy	79 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	> 25

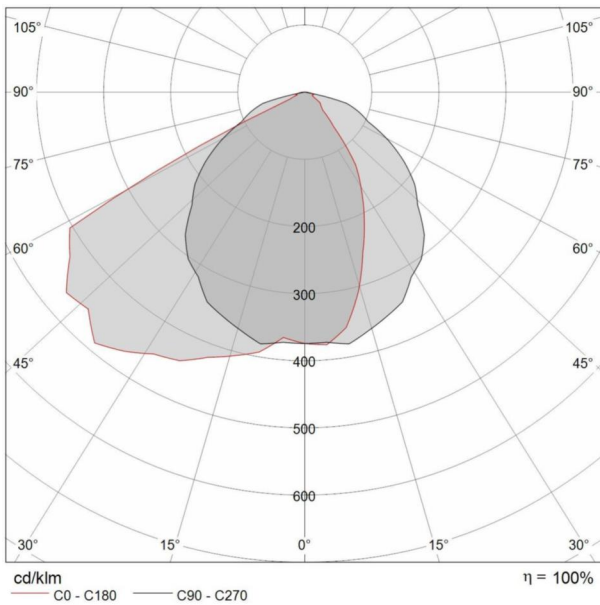



Chim | Wall Lights | Accessories
92681W12



Outer casing
L=105mm, H=150mm, D=61mm

Code
98009