







Wall Lights | 1 x powerLED 1,0 W 350 mA | CRI 80  
**93986W30**



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Indoor
Light Source	LED
Optic	30°
Power	1 W
Luminous flux (source)	130 lm
Current intensity	350mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP44
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C ÷ +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.12 m
Resin potting	Yes

Finishing casing	
Material	Brass
Colour	white RAL 9010
Processing	Coating
Electronics	
	On/Off Driver 6 art.
	1-10V - N/O button 1 art.
	On/Off Driver 1 art.
	On/Off Driver 3 art.
	DALI - Push and Simply Dim 1 art.

Wall Lights | 1 x powerLED 1,0 W 350 mA | CRI 80  
93986W30

Single emission wall lights for indoor application. The warm white LED light source with a 30° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 130 lm, with a 130.0 lm/W nominal luminous efficacy.



The device body is made of brass and features a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP44; the total weight is of 0.072 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 1,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights or ceiling-mounted, with a 18 mm diameter hole (in plasterboard) with an outer casing, code 84337(for concrete or masonry).

Illuminotechnical Features		
Light Output Ratio (LOR)	85 %	
Luminous flux (source)	130 lm	
Luminaire luminous flux	111 lm	
Consumption	1,0 W	
Luminaire efficacy	111 lm/W	
Colour temperature	3000 K	
Colour rendering index	80 Ra	

UGR		
X=4H   Y=8H	S=0.25H	
Reflection factor	70/50/20	
UGR transversal	> 25	
UGR axial	> 25	

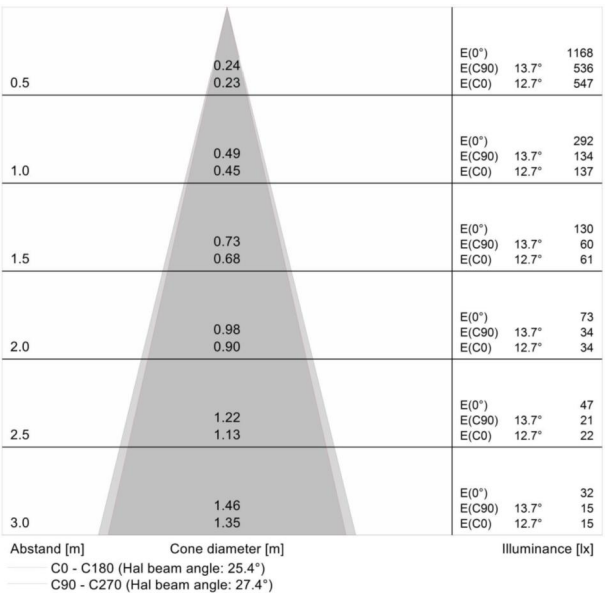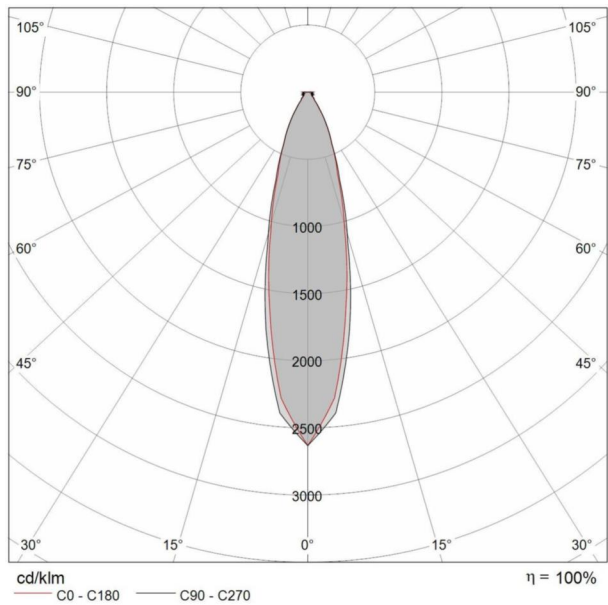



llamt\_1 | Wall Lights | Accessories  
**93986W30**



Controcassa  
L=37mm, H=25mm, D=25mm

Code  
84337