





Wall Lights | 1 x powerLED 2,0 W 630 mA | CRI 80  
**97086W30**

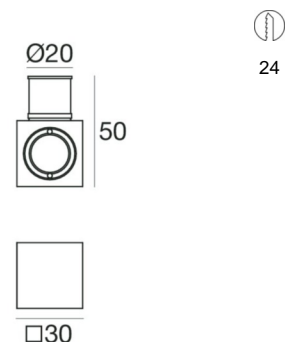

Technical data	
Installation position	Wall lights
Installation environment	Indoor - Outdoor
Light Source	LED
Optic	30°
Power	2 W
Luminous flux (source)	208 lm
Current intensity	630mA
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP66
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C ÷ +50°C
Driver included	No
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	1 m
Resin potting	Yes

Finishing casing	
Material	Brass
Colour	embossed white RAL 9003
Processing	Coating

Electronics	
	On/Off Driver 1 art.
	On/Off Driver 3 art.
	On/Off Driver 6 art.

Wall Lights | 1 x powerLED 2,0 W 630 mA | CRI 80  
97086W30

Single emission wall lights for indoor or outdoor application. The warm white LED light source with a 30° light distribution is composed of 1 powered LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 208 lm, with a 104.0 lm/W nominal luminous efficacy.



The device body is made of brass and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP66; the total weight is of 0.174 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 2,0 W. The power supply cable is included and features.

The device features protection class III and can be wall lights-mounted, with a 24 mm diameter hole (in plasterboard) with an outer casing, code 84349(for concrete or masonry).

Illuminotechnical Features	
Light Output Ratio (LOR)	96 %
Luminous flux (source)	208 lm
Luminaire luminous flux	200 lm
Consumption	2,0 W
Luminaire efficacy	100 lm/W
Colour temperature	3000 K
Colour rendering index	80 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 25
UGR axial	> 25

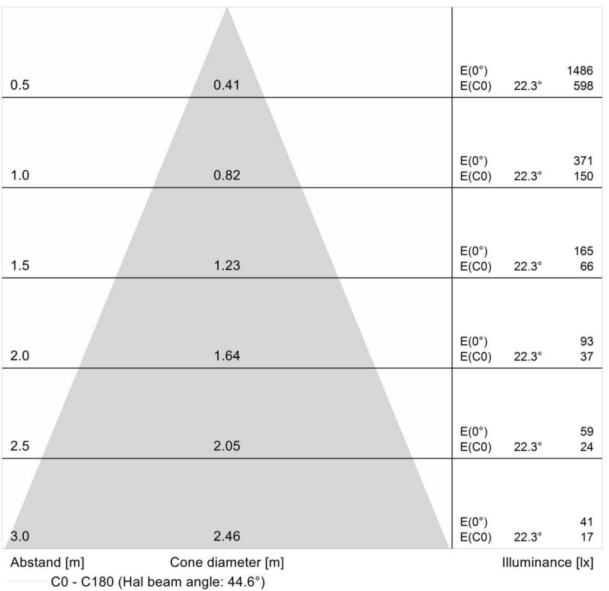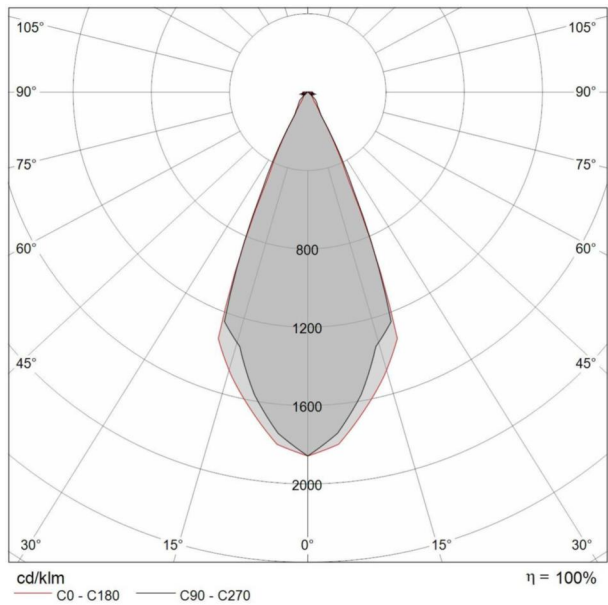



Ilamt66 | Wall Lights | Accessories  
**97086W30**



Controcassa  
L=42mm, H=30mm, D=30mm

Code  
84349