







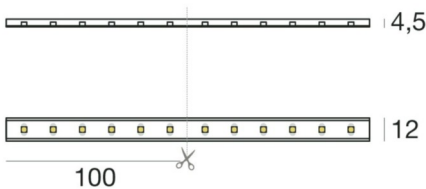

LED Strip | stripLED 24 W 24 V | CRI 70  
98028



Technical data	
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Power	24 W
Luminous flux (source)	1850 lm
Tensione	24V
CCT / Tonalità	4000 K
Colour rendering index	70 Ra
C.C. / C.V.	CV
Safety class	3
IP	IP66
Glow wire test	No°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-20°C / +40°C
Driver included	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2 m
Resin potting	No

Electronics	
	1-10V
	On/Off Driver
	On/Off Driver
	On/Off Driver

LED Strip | stripLED 24 W 24 V | CRI 70  
98028

Single emission led strip for outdoor application. The natural white LED light source with a diffused light distribution is composed of 5 stripled LEDs with CCT of 4000 K and a CRI 70; the source luminous flux is 1850 lm, with a 77.1 lm/W nominal luminous efficacy.


The ingress protection degree is IP66; The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 24 W. The power supply cable is included and features.







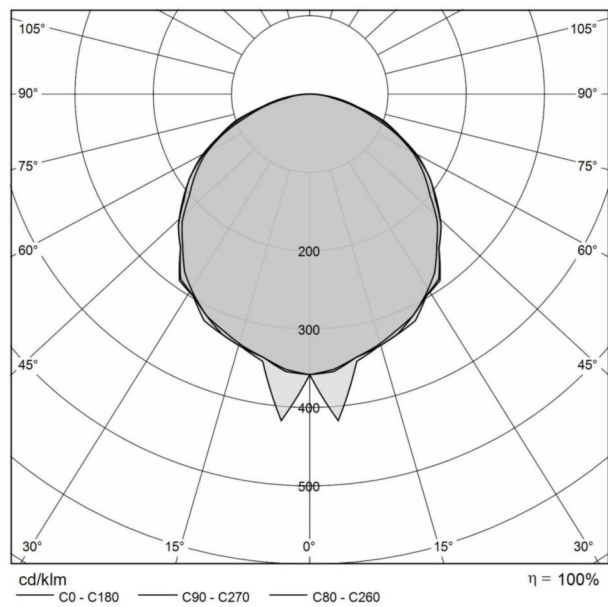



The device features protection class III and can be wall lights or ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	4 %
Luminous flux (source)	1850 lm
Luminaire luminous flux	74 lm
Consumption	1,0 W
Luminaire efficacy	77 lm/W
Colour temperature	4000 K
Colour rendering index	70 Ra

UGR	
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 25
UGR axial	> 25





		Cable and connector Length 2000 mm; insulation doppio; section 0.75 mm²; cable gland: no; colors: nero - rosso.	Code 99000
		Cable and connector Length 2000 mm; insulation doppio; section 0.75 mm²; cable gland: no; colors: nero - rosso.	Code 89629
		Profile	Code 98061
		Profile	Code 98066
		Fixing kit	Code 98063
		Fixing kit	Code 98064
		Fixing kit	Code 98065
		Diffuser	Code 98062



silicone\_c | LED Strip | Accessories  
**98028**

---