

# CITY

21-Feb.-2017

## 1.6

LED 10W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115184W\_

### LIGHT COLOUR

2700K | >80CRI | 750lm

2

3000K | >80CRI | 850lm

4

## 2.6

LED 16W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115284W\_

### LIGHT COLOUR

2700K | >80CRI | 1250lm

2

3000K | >80CRI | 1400lm

4

## 3.5

LED 26W | 220-240VAC | 50-60Hz | PCB 3-step | incl. PS | phase cut dim

CE P44 0,3m P

white texture

115384W\_

### LIGHT COLOUR


2700K | >80CRI | 2400lm

2


3000K | >80CRI | 2700lm

4


①



③

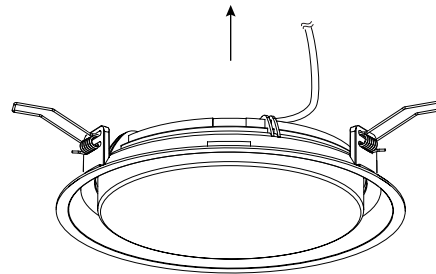

## DIMENSIONS

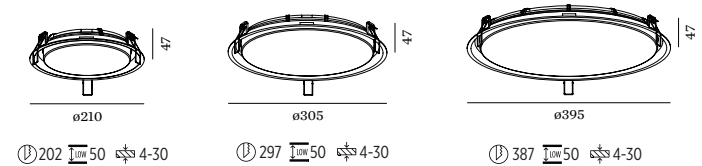


CITY 1.6


CITY 2.6

CITY 3.5

## MOUNTING INSTRUCTION

- ① Make a hole in the ceiling according to the prescribed dimensions.
  - ② **POWER CONNECTION**  
integrated power supply  
connect directly to 220-240VAC
- 
- ③ Turn the springs and insert the fixture in the ceiling hole

IP20



**IP RATING when installed.**  
(Fixture is IP20 for the recessed part & IP44 at the visible side)

The light source of the integrated LED is not replaceable;  
When the light source reaches its end of life the whole luminaire shall be replaced.



Caution, risk of electric shock



**WEVER & DUCRÉ**  
LIGHTING

[www.weverducre.com](http://www.weverducre.com)

Wever & Ducré bvba Kwadestraat 153 bus 2.1 8800 Roeselare

**INSTALLATION  
INSTRUCTIONS**