

CORK

14-09-2015

1.0

LED 3W | 120-240VAC | 50-60Hz | PCB 3-step | incl. power supply

CE \oplus IP20 \square 960°C \downarrow 0,3m \uparrow 36° \odot \blacksquare

white texture 210163W
black texture 210163B


LIGHT COLOUR

2200K | >80CRI | 120lm 1
2700K | >80CRI | 180lm 2

OPTIONAL


bottle 1 | 75/174 | glass 90019013
bottle 2 | 87/323 | glass 90019014

ACCESSORIES

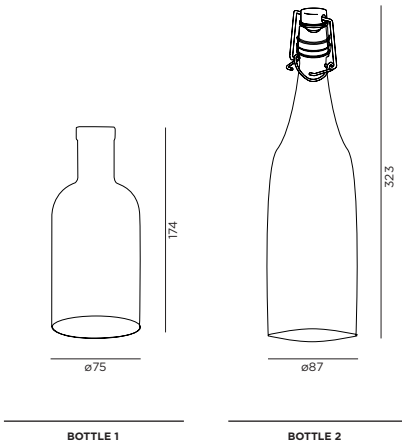


Alternatively, every bottle can be used with precaution of:

- Max. 1kg weight
- Inner collar dimension from bottle 16,50 - 19,50mm

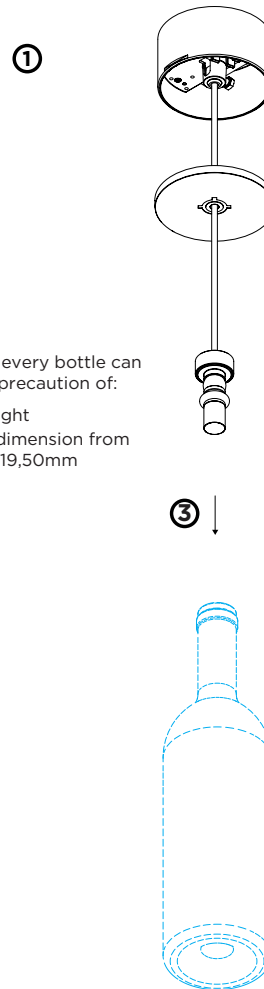


DIMENSIONS



① MOUNTING INSTRUCTION

Attach the ceiling base on the ceiling

② POWER CONNECTION



③ Insert the inner module into the bottle*

④ Hold bottom part (LED side) and turn top part by hand left or right to adjust the diameter

⑤ Put LED module in the bottle
Ensure that there is already some friction

⑥ Turn top part further until the bottle is tightly attached



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS