SPURBANM
Design by Dima Loginoff

Collection consisting of aluminium ceiling lamps and suspended lamps.
Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings
- Built in line voltage LED module
- CCT 3000 K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off, dimmable trailing edge
- Die cast aluminium body, painted
- Opalescent diffuser

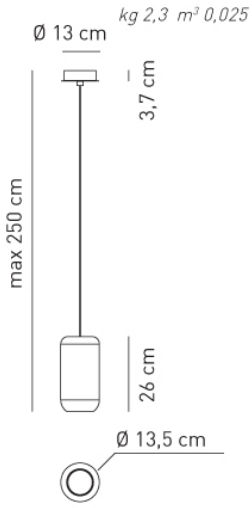

Product code composition

URBAN / solo con illuminazione verso il basso / *downward lighting only*

Type	Article	Colours	Finishing	Source
SP	URBAN M	BC wrinkled white	XX	LED 15W - diffused beam **3000K** available on request **2700K** or **4000K**
		BR matt bronze		
		NI matt nickel		

CE IP20 CRI90 dimmable trailing edge 220-240VAC LED ~1350 lm 90 lm/W

example composition code | SP | URBANM | NI | XX | LED

Available colors

BC
Wrinkled white

BR
Matt bronze

NI
Matt nickel

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER_____ NOTES_____

SPURBANM _ _ XXLED

NOTICE:
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.