

GIGANT | MACBETH LED

28-03-2017

10.0

LED 42W | 220-240VAC | 50-60Hz | PCB 3-step | dali switch dim

CE IP20 960°C 0,3m P

white texture

213185W

LIGHT COLOUR

3000K | >85CRI | 5000lm 4

4000K | >85CRI | 5300lm 6

OPTIONAL

suspension set 4.0m 90015114

16.0

LED 83W | 220-240VAC | 50-60Hz | PCB 3-step | dali switch dim

CE IP20 960°C 0,3m P

white texture

213285W


LIGHT COLOUR

3000K | >85CRI | 9900lm 4


4000K | >85CRI | 10400lm 6

OPTIONAL




suspension set 4.0m 90015114

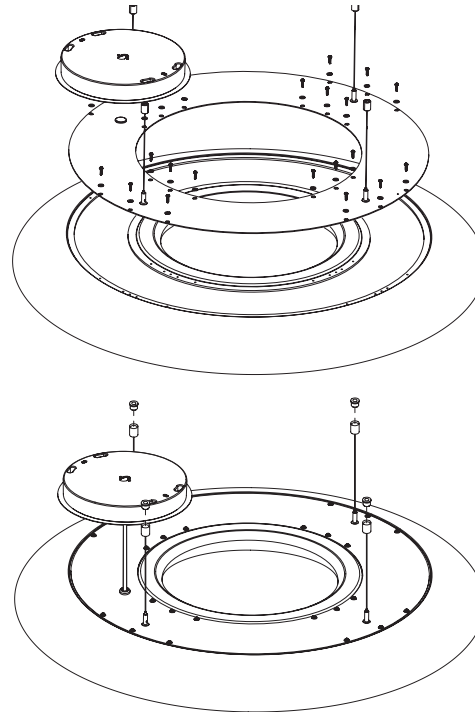

DIMENSIONS

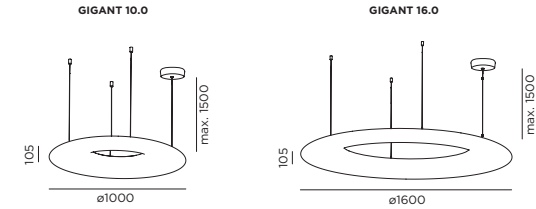


MOUNTING INSTRUCTION

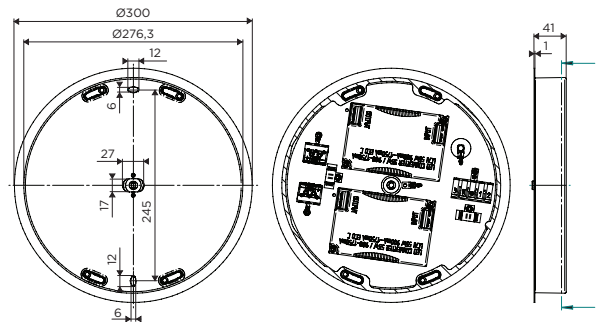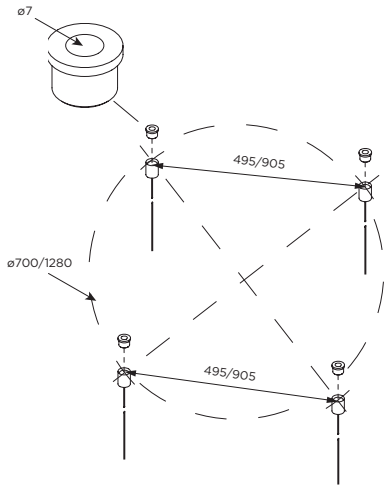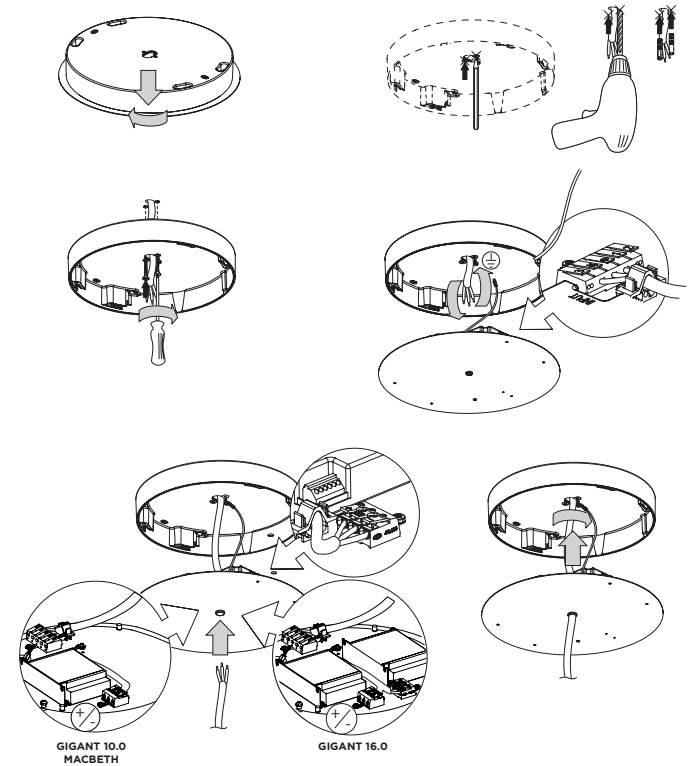


GIGANT | MACBETH LED

28-03-2017

GIGANT 10.0

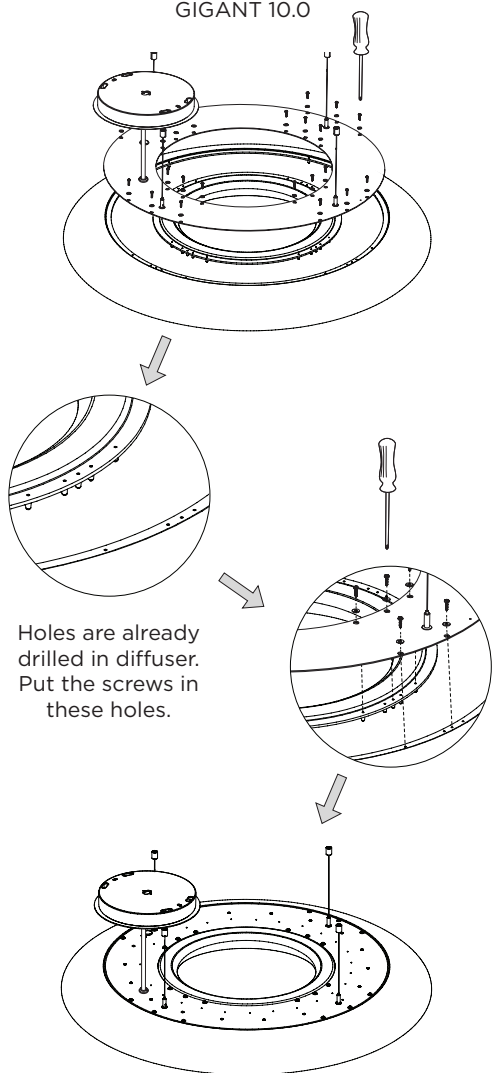


GIGANT 16.0

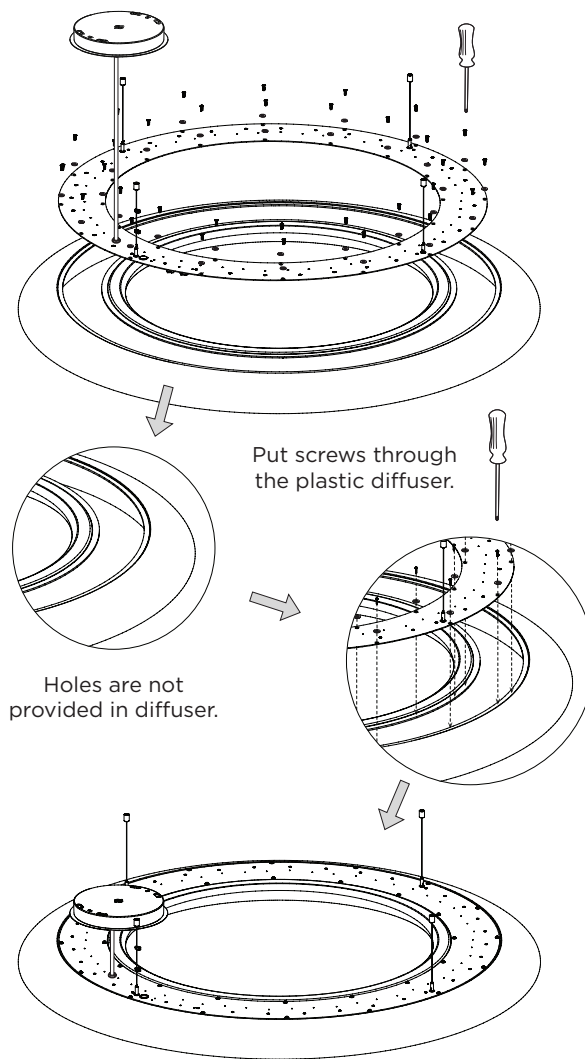

DETAILED MOUNTING INSTRUCTION


GIGANT 10.0:

The diffuser from GIGANT 10.0 is already provided with pre-drilled holes. Align the holes from the LED base plate with the pre-drilled holes in the diffuser and fix with self-tapping screws.

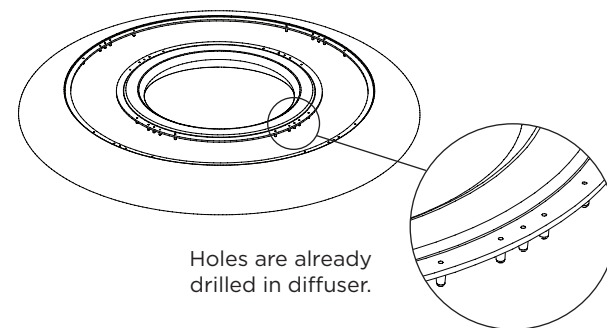

GIGANT 16.0:



The diffuser from GIGANT 16.0 is NOT provided with pre-drilled holes. Fix the LED base plate to the diffuser with self-tapping screws by screwing through the plastic material of the diffuser.

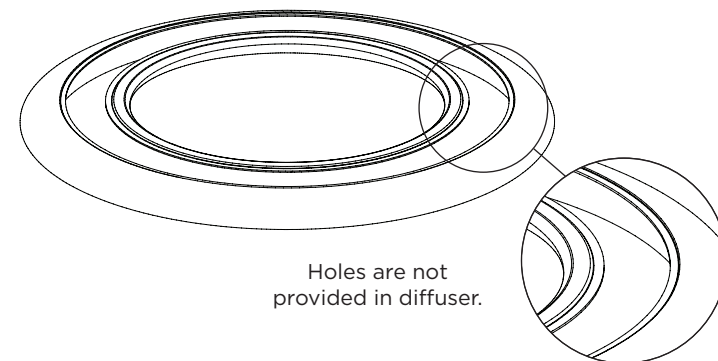


MACBETH | GIGANT LED

28-03-2017


1.0	
LED 42W 220-240VAC 50-60Hz PCB 3-step dali switch dim	
CE IP20 960° 0,5m	
white texture	212185W
LIGHT COLOUR	
3000K >85CRI 4500lm	4
4000K >85CRI 4800lm	6
OPTIONAL	
suspension set 4.0m	90015114

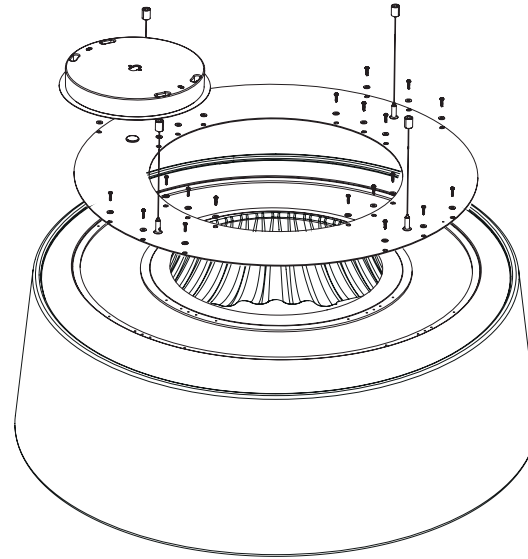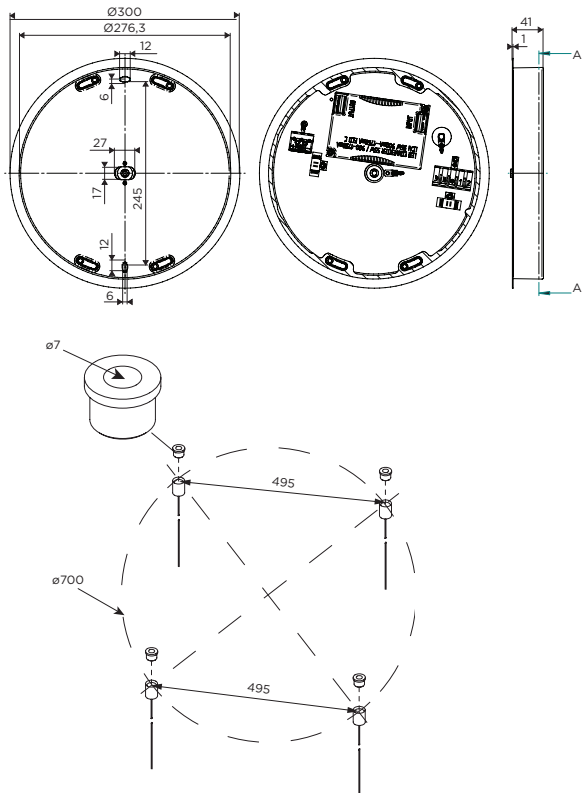

DIMENSIONS



MOUNTING INSTRUCTION

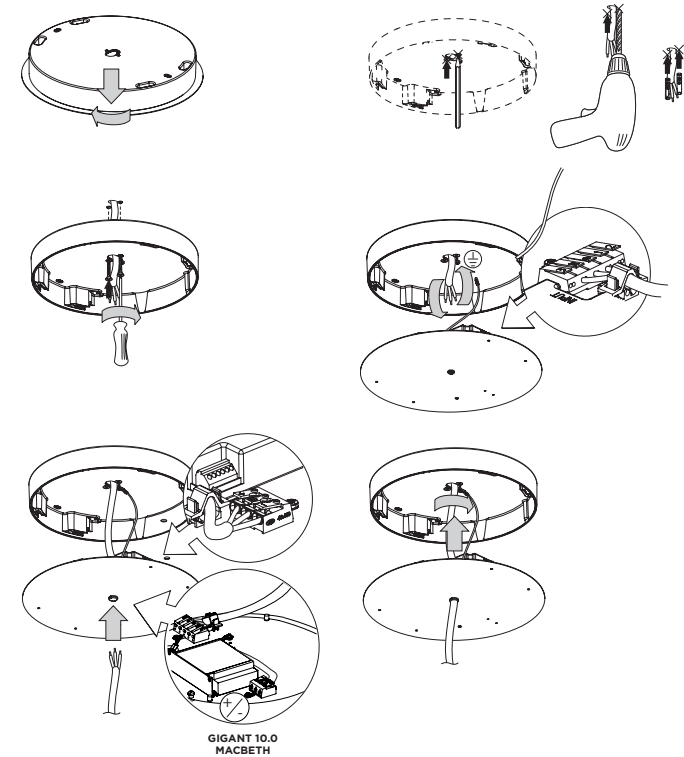

DIMMING


28-03-2017

TALEXX CONVERTER - ECO series
 max. 55W | 900-1750mA | constant current | DIM 1-100%
 DALI DEVICE type 6 | DSI | switchDIM
 suitable for emergency lighting units (EN50172)

IP20 SELV       RoHS




DIMENSIONS

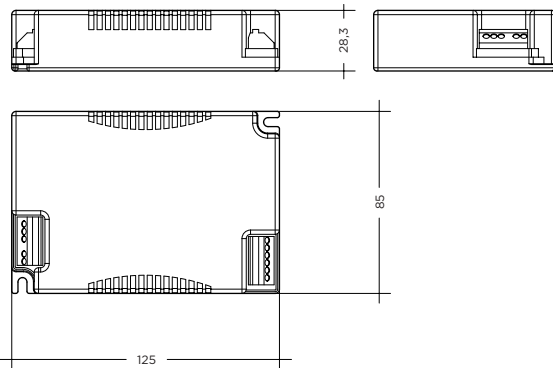

GIGANT 10.0 | MACBETH 1.0 DALI & SWITCH DIM

CIRCUIT DIAGRAM

220-240V
 0-50-60Hz

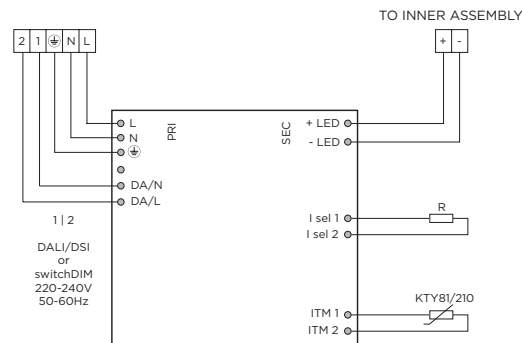

GIGANT 16.0 DALI & SWITCH DIM

CIRCUIT DIAGRAM

220-240V
 0-50-60Hz

