


DOWNUNDER OUT LED L recessed wall light

anthracite, SMD LED 3000K, IP55

Article number	233615
Feed-in capability	No
Number of light sources	15
Lamp included	Yes
Installation width	12.8 cm
Installation depth	7 cm
Width	14 cm
Height	14 cm
Depth	5 cm
Net weight	0.499 kg
Gross weight	0.563 kg
Voltage	230 Volts
Max. wattage	3.3 Watt
Protection class	I
IP-rating	IP 55
Average lifespan	20000 Hours
Colour temperature	3000 Kelvin
Colour rendering index	80
Luminous flux	85 lm
Energy class luminaire	A -
Suitable for lamps from EEC	A
Suitable for lamps up to EEC	A++
Lamp	SMD LED
Material	Aluminium / Plastic
Colour	Anthracite
Way of mounting	Recessed wall mounting
Remark 1	Mounting with mounting box only (incl.)
Light distribution type 1	direct
Light distribution type 2	indirect
Light distribution type 3	Axis-symmetric

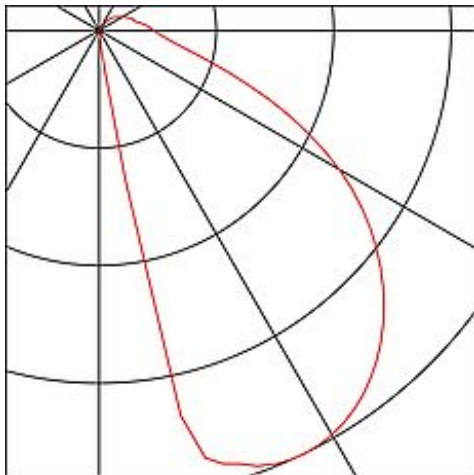

The DOWNUNDER OUT LED Series Recessed Wall Luminaire is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. The luminaire's IP55 class protection type makes it suitable for outdoor use. The luminaire can be directly connected to 230V electrical mains, and a recessed fixing canister is included in delivery for easy installation.