




Systems | 220-240 V | 2xG9
TR4302-48

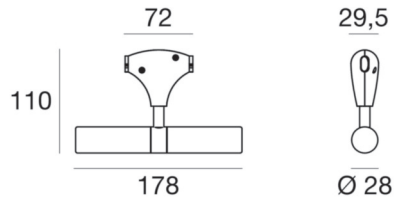

Technical data	
Type	Systems
Installation position	Ceiling
Installation environment	Indoor
Lamp cap	2 x G9 Max 40W
Optics	General Lighting
Safety class	2
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	0.25 Kg

Finishing casing	
Material	Iron - Brass - PC
Colour	nickel - nickel - champagne
Processing	Electroplating - Brushing
Finishing diffuser	
Material	Glass
Processing	Sandblasting



Systems | 220-240 V | 2xG9
TR4302-48

Single emission systems for indoor application. Compatibility: halogen 40 W; lamp cap 2xG9.

The device body is made of iron and features a nickel finish, processed by means of electroplating. The device body is made of brass and features a nickel finish, processed by means of brushing. The device body is made of PC and features a champagne finish; the diffuser is made of glass with a sandblasting treatment. The ingress protection degree is IP40; the total weight is 0.25 kg.

The device features protection class II and can be ceiling-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	72 %
Luminous flux (source)	980 lm
Luminaire luminous flux	648 lm
Consumption	80 W
Luminaire efficacy	11 lm/W
Colour temperature	2700 K

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	< 25

OPTICAL	
Light distribution symmetry	Asymmetrical
C0/C180 optics	180°
C90/C270 optics	116°

