

XAL

TRAPEZ 400 trimless

063-93466370

PROJECT

TYPE

NOTES

QUANTITY

DATE

GENERAL

Ceiling
Recessed
white
IP20
3410 lm
Extended Configuration

LED

4000 K
CRI ≥ 80
L80 / 50000 h
photobio. safety RG 0 - no Risk
initial ≤ 3 MacAdam

OPTICAL

Opal

PHYSICAL


length 500 mm
width 500 mm
height 115 mm
9 kg

ELECTRICAL

DALI-2 / CLO
41 W
83 lm/W
1 DALI Addr.
PC1 220-240V


CUTOUT

length 505 mm
width 505 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 15 mm
recessed depth 165 mm

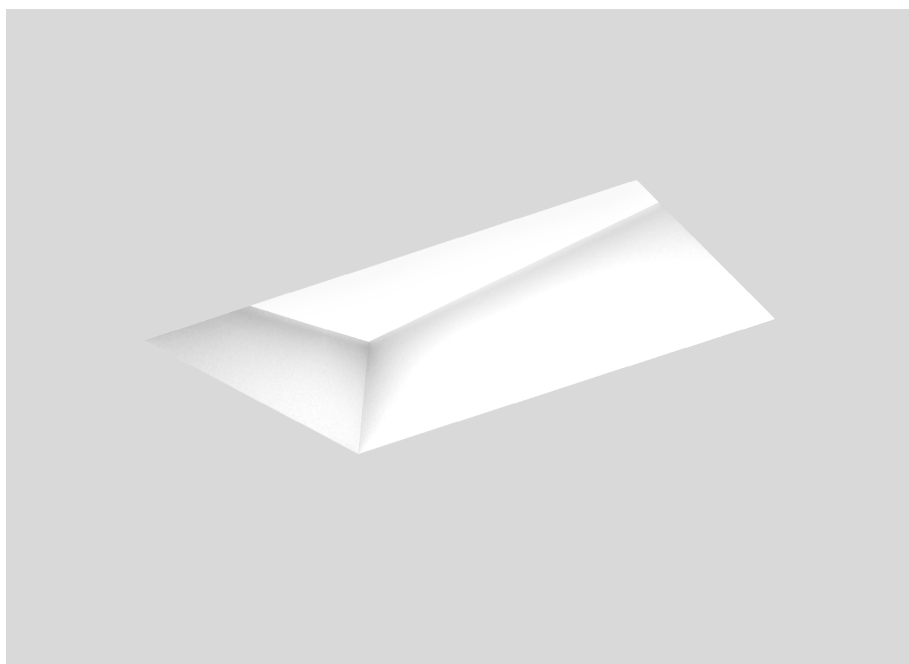

polygonal light fitting made of plaster (paintable) for rimless installation in plasterboard ceilings; luminaire comprises housing and inset lights; luminaire housing for recessed ceiling mounting supplied in advance; inset mountable in housing from below without tools; suitable for ceiling thickness of 12.5-15mm; light inset highly reflective lacquered for higher efficiency; LED light inset incl. heat sink exchangeable; light colour 4000 K; Binning initial ≤ 3 MacAdam; CRI ≥ 80 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; completely homogeneously illuminated, satin PMMA cover; same luminance for all flat luminaires; external converter for ceiling insertion, through-wiring suitable; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; including DALI dimmable converter; with CLO function: constant light output over the lifespan; additional energy savings through reduced LED current flow at start;

Light Distribution



505x505 165

