

XAL NOD suspended

072-65224180

PROJECT

TYPE

NOTES

QUANTITY

DATE

GENERAL

Ceiling

Suspended

black matt

IP20

887 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

photobio. safety RG 0 - no Risk

initial ≤ 3 MacAdam

OPTICAL

Opal

PHYSICAL

Rod 1500 mm

diameter 250 mm

height 125 mm

0.55 kg

tilt max 180°

rotation 330°


ELECTRICAL

non DIM / phase-cut

10 W

89 lm/W

PC1 220-240V

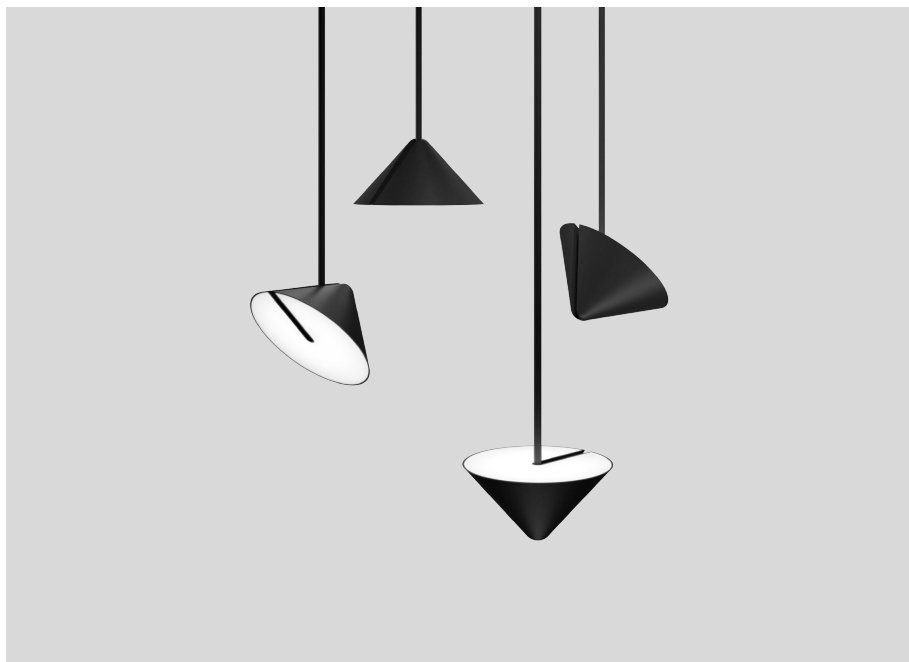

Cone-shaped luminaire housing made of plastic; luminaire housing 330° rotatable and 180° tiltable pivot-mounted; elegant suspended luminaire with black soft-touch surface; with adjustable pendant rod mounting (black) 1500 mm, feed in rod; completely homogeneously illuminated, satinised PMMA cover; light colour 2700 K; Binning initial ≤ 3 MacAdam; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; cone-shaped canopy with 2 cable openings and terminal clamps; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; incl. converter, non dimmable;

Light Distribution

