



**PTMELT55**

Design by Sandro Santantonio

Collection consisting of wall lamps, suspended lamps and floor lamps. The lampshades coming in various decorative patterns. Screw fitting light source.

Typology: FLOOR LAMP


Ratings

- E27
- Downlight
- Floor standing
- Supply voltage ~220-240V
- Switch mode: on-off with dimmer
- Steel frame, painted

Product code composition

**MELTING POT** / sono richieste lampade dimmerabili / *dimnable lamps required*

kg 11.2 m³ 0.356

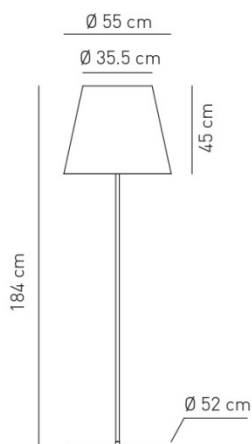

| Type | Article | Colours  | Finish                         | Source   |
|------|---------|--|--------------------------------|--|
| PT   | MELT 55 | <b>BA</b> two light patterns outside / silver inside | <b>GR</b> grey varnished metal | <b>E27</b> 3 x Max 16W LED or 3 x Max 70W halo |
|      |         | <b>BO</b> two light patterns outside / gold inside   |                                |  |
|      |         | <b>NA</b> two dark patterns outside / silver inside  |                                |  |
|      |         | <b>NE</b> two dark patterns outside / gold inside    |                                |  |



example composition code | **PT** | **MELT55** | **BO** | **GR** | **E27**

Available colours



- |   |   |  |  |
|---|---|--|--|
| <b>BA</b><br>Light patterns outside / silver inside | <b>BO</b><br>Light patterns outside / gold inside | <b>NA</b><br>Dark patterns outside / silver inside | <b>NE</b><br>Dark patterns outside / gold inside |
|---|---|--|--|

EELc (Energy Efficiency Label compatibility): E, D, C, B, A, A+, A++

PTMELT55\_ \_GRE27      CUSTOMER \_\_\_\_\_      NOTES \_\_\_\_\_

NOTICE:  
Luminous flux (lm) and efficacy (lm/W) for all integrated LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.