



SPULI120

Design by Timo Ripatti


Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.
Available in several colours and sizes.

Typology: SUSPENDED

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight
- Surface installation over holes
- Supply voltage ~100-240VAC
- Switch mode: on-off
- Dimmable 1-10V LED driver
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

Product code composition

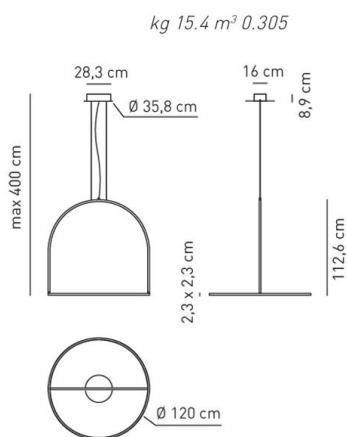

U-LIGHT / downward lighting only / DRIVER INCLUDED

Type	Article	Colours	Code End	Source
SP	ULI 120 LED	AN anthracite grey RU rust brown	XX	LED 86W - diffused beam 3000K other CCT available on request. please ask to our customer service.

CE	IP20	CRI90	LED	~7354 lm	86 lm/W	100-240VAC
example composition code SP ULI120LED AN XX						

Available colors



AN
Anthracite
grey

RU
Rust brown

EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

CUSTOMER _____ NOTES _____

SPULI120LED _ _ XX

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.