
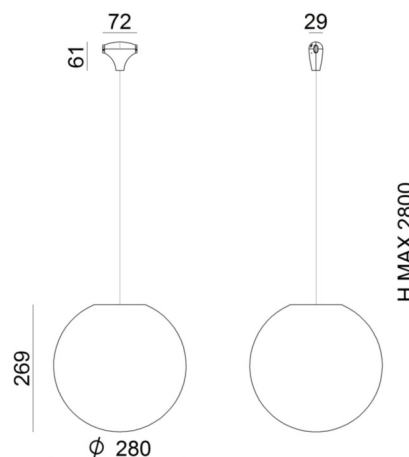


Systems | 220-240 V | topLED 8 W 350 mA | CRI 80
10140



Technical data	
Type	Mono System
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward and upward
Power	8 W
Luminous flux (source)	1002 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Induction	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.306 Kg

Finishing casing	
Material	PC
Colour	white
Finishing diffuser	
Material	PE
Colour	neutral

Systems | 220-240 V | topLED 8 W 350 mA | CRI 80
10140

Double emission systems for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1002 lm, with a 125.3 lm/W nominal luminous efficacy.

The device body is made of PC and features a white finish; the diffuser is made of pe. The ingress protection degree is IP20; the total weight is of 1.306 kg.

The total absorbed power is 8 W.

The device features protection class II and can be wall lights-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	84 %
Luminous flux (source)	1002 lm
Luminaire luminous flux	845 lm
Consumption	8 W
Luminaire efficacy	105 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 16
OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°