
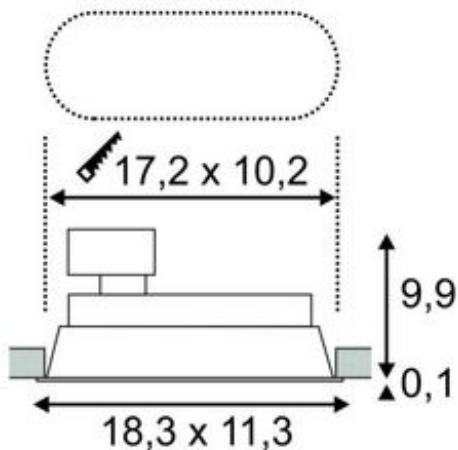


HORN

recessed fitting, double-headed, QR-C51, oval, white, max. 100W, tiltable, incl. clip springs

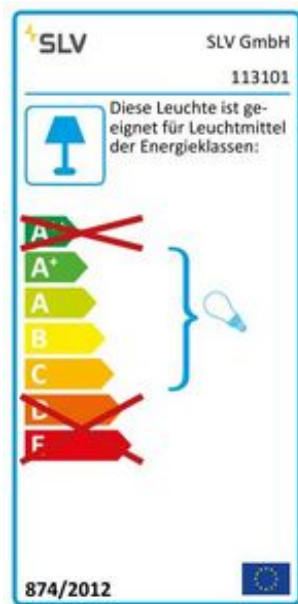

Article number	113101
Feed-in capability	No
LBS code	QR-C51
Lampholder / Socket	GU5.3
Number of light sources	2
Lamp included	No
Installation length	17.2 cm
Installation width	10.2 cm
Installation depth	11 cm
Tilt range	60 Degree
Rotation range	350 Degree
Length	18.3 cm
Width	11.3 cm
Height	10 cm
Net weight	0.326 kg
Gross weight	0.437 kg
Voltage	12 Volts
Max. wattage	100 Watt
Protection class	III
Energy efficiency class	A+
Lamp	MR16 12V
Material	Aluminium / Steel
Colour	white
Way of mounting	Recessed ceiling mounting
Remark 1	For recessed installation in ceilings with a maximum thickness of 25 mm
Remark 2	Not suitable for the use of cool-beam lamps
Light distribution type 1	direct

Adjustable low-voltage downlight of our HORN series. The fitting is made from steel and the lamp itself is placed to the luminaire's rear. This design creates a special look. The electrical connection is made via a separately available 12V low-voltage transformer. Single-spot as well as high-voltage versions are also available. This luminaire is compatible with bulbs of the energy classes: C - A+