

XAL FLOW EVO 320 surface DIRECT

073-013161GO

PROJECT
TYPE
NOTES
QUANTITY
DATE

GENERAL

Ceiling / Wall
Surface
gray
IP40
2120 lm
RAL9006 ^a
Extended Configuration

LED

4000 K
CRI ≥ 80
L80 / 50000 h
photobio. safety RG 0 - no Risk
initial ≤ 3 MacAdam

OPTICAL

Opal


PHYSICAL

length 311 mm
width 311 mm
height 46 mm
2.1 kg

ELECTRICAL

non DIM
15 W
141 lm/W
PC1 220-240V

^a RAL Palette colors may deviate slightly due to production conditions.

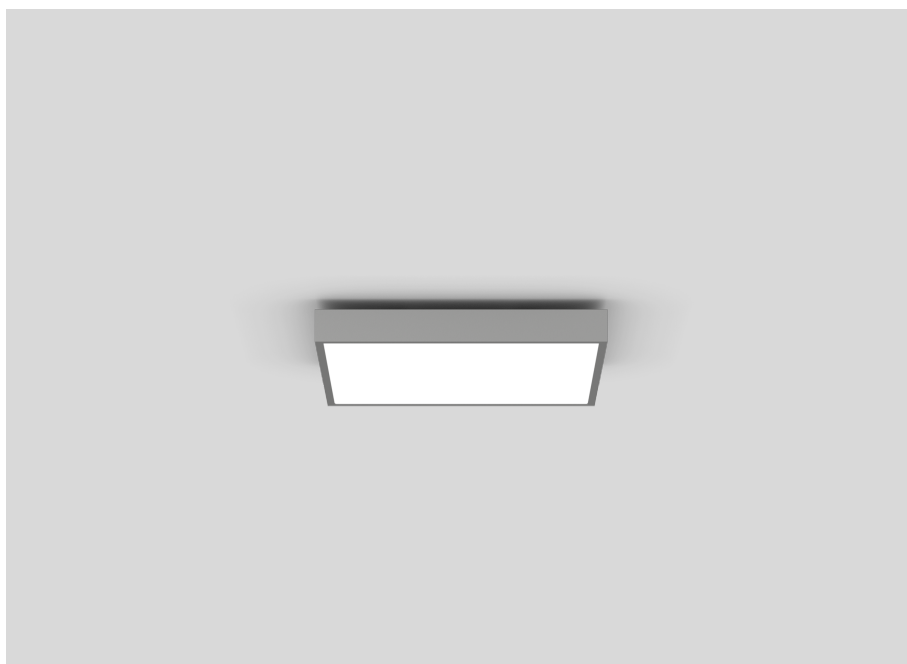

Square light fitting made of aluminium; flat design (luminaire housing 35mm); surface gray powder coated; suitable for wall or ceiling mounting; luminaire housing set 11mm away from wall or ceiling; convenient quick mounting system without tools; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; completely homogeneously illuminated, satin PMMA cover; same luminance for all flat luminaires; light colour 4000 K; Binning initial ≤ 3 MacAdam; CRI ≥ 80; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminal for through wiring; degree of protection IP40; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. converter, non dimmable;

Light Distribution

